



www.achem.com

ACHEM. wonder.

Contents

OPP & Dispenser Series --- P6~P27




PVC Tape Series --- P28~P53



Multifunction Series --- P54~P73



OPP & Dispenser Series



Stationery Tape
Page 20



Dispenser
Page 24



Packaging tape
Page 8



SOLVENT




EMULSION



HOT MELT



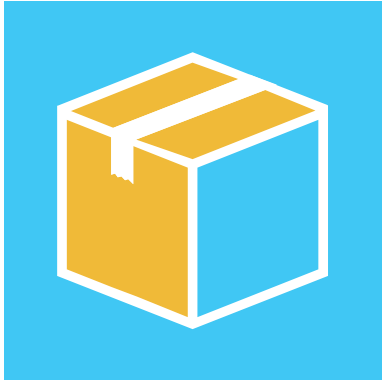

Packaging Tape



 General Use											
	Product No.	Thickness mm(mils)	Backing mm(mils)	Adhesion kg/cm(oz/in)	Holding Power (mins)	Elongation (%)	Tensile Strength kg/cm(lbs/in)	Color	Printing	RoHS	REACH
	12750	0.04(1.57)	0.025(0.98)	0.2(17.64)	1440	140	2.8(15.4)			⊙	⊙
	12730	0.043(1.69)	0.025(0.98)	0.24(21.16)	1440	140	2.8(15.4)			⊙	⊙
	12K00	0.045(1.77)	0.025(0.98)	0.24(21.16)	1440	140	2.8(15.4)	⊙		⊙	⊙
	12800	0.05(1.97)	0.028(1.1)	0.24(21.16)	1440	140	3.6(19.8)	⊙		⊙	⊙
	12200	0.054(2.13)	0.028(1.1)	0.26(22.93)	1440	140	3.6(19.8)	⊙	⊙	⊙	⊙
	12300	0.066(2.6)	0.04(1.57)	0.28(24.69)	1440	140	4.8(26.4)	⊙		⊙	⊙
	12G00	0.068(2.68)	0.04(1.57)	0.28(24.69)	1440	140	4.8(26.4)	⊙		⊙	⊙
	12400	0.089(3.5)	0.06(2.36)	0.32(28.22)	1440	140	6.7(36.85)		⊙	⊙	⊙

 Crystal Clear											
	Product No.	Thickness mm(mils)	Backing mm(mils)	Adhesion kg/cm(oz/in)	Holding Power (mins)	Elongation (%)	Tensile Strength kg/cm(lbs/in)	Color	Printing	RoHS	REACH
	X12KL	0.045(1.77)	0.025(0.98)	0.24(21.16)	1440	140	2.8(15.4)			⊙	⊙
	128L0	0.05(1.97)	0.028(1.1)	0.24(21.16)	1440	140	3.6(19.8)			⊙	⊙
	123U0	0.065(2.56)	0.04(1.57)	0.3(26.46)	1440	140	4.8(26.4)			⊙	⊙
	123S0	0.065(2.56)	0.04(1.57)	0.3(26.46)	1440	140	4.8(26.4)			⊙	⊙
	123L0	0.068(2.68)	0.04(1.57)	0.3(26.46)	1440	140	4.8(26.4)			⊙	⊙
	125L0	0.08(3.15)	0.05(1.97)	0.32(28.22)	1440	160	5.5(30.25)			⊙	⊙

★ The data provided herein are measurement only, and are not guaranteed.


 Low Temperature	 Product No.	 Thickness mm(mils)	 Backing mm(mils)	 Adhesion kg/cm(oz/in)	 Holding Power (mins)	 Elongation (%)	 Tensile Strength kg/cm(lbs/in)	 Color	 Printing	 RoHS	 REACH
	12270	0.054(2.13)	0.028(1.1)	0.4(35.27)	1440	140	3.6(19.8)			⊙	⊙
	12440	0.095(3.74)	0.06(2.36)	0.32(28.22)	1440	140	6.7(36.85)	⊙		⊙	⊙

 Low Noise	 Product No.	 Thickness mm(mils)	 Backing mm(mils)	 Adhesion kg/cm(oz/in)	 Holding Power (mins)	 Elongation (%)	 Tensile Strength kg/cm(lbs/in)	 Color	 Printing	 RoHS	 REACH
	122Y0	0.055(2.17)	0.028(1.1)	0.26-0.4 (26.45-35.27)	1440	140	3.6-6.7 (19.8-36.85)			⊙	⊙
	12360	0.065(2.56)	0.04(1.57)	0.3(26.46)	1440	140	4.8(26.4)	Clear&Brown		⊙	⊙


 Crystal Clear Plus Low Noise	 Product No.	 Thickness mm(mils)	 Backing mm(mils)	 Adhesion kg/cm(oz/in)	 Holding Power (mins)	 Elongation (%)	 Tensile Strength kg/cm(lbs/in)	 Color	 Printing	 RoHS	 REACH
	123U0	0.065(2.56)	0.04(1.57)	0.3(26.46)	1440	140	4.8(26.4)			⊙	⊙
	123S0	0.065(2.56)	0.04(1.57)	0.3(26.46)	1440	140	4.8(26.4)			⊙	⊙



★ The data provided herein are measurement only, and are not guaranteed.

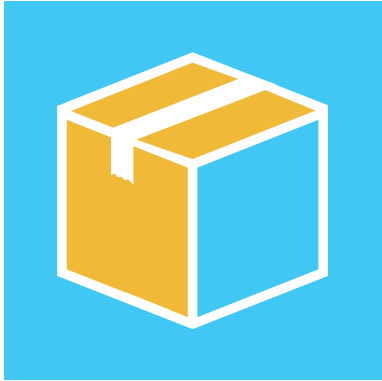

Packaging Tape

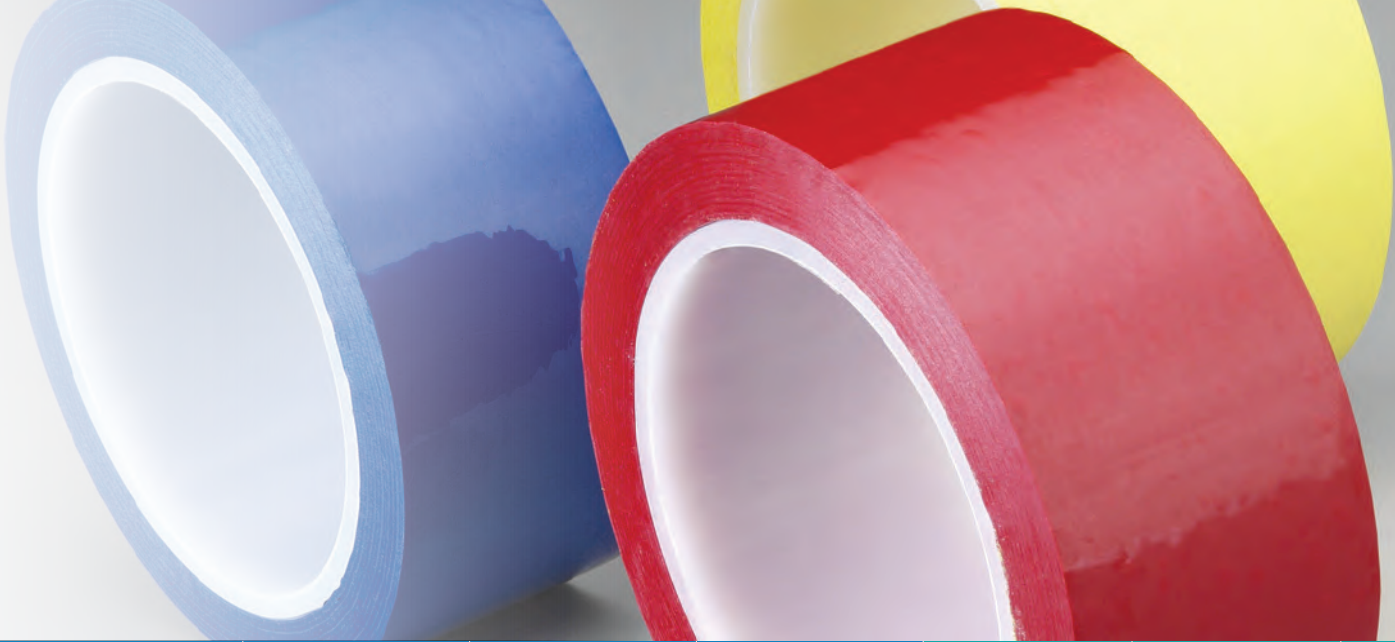


 General Use	 Product No.	 Thickness mm(mils)	 Backing mm(mils)	 Adhesion kg/cm(oz/in)	 Holding Power (mins)	 Elongation (%)	 Tensile Strength kg/cm(lbs/in)	 Color	 Printing	 RoHS	 REACH
	A2342	0.038(1.496)	0.025(0.984)	0.14(11.99)	1440	100~200	3.26(17.95)		☉	☉	☉
	A2N03	0.038(1.496)	0.025(0.984)	0.16(14.11)	1440	80~180	2.56(14.08)	☉	☉	☉	☉
	A2362	0.04(1.575)	0.025(0.984)	0.16(14.11)	1440	100~200	3.26(17.95)		☉	☉	☉
	A21B2	0.04(1.575)	0.023(0.906)	0.17(14.82)	1440	100~200	2.4(13.2)		☉	☉	☉
	A2093	0.04(1.575)	0.023(0.906)	0.2(17.64)	1440	80~180	2.24(12.32)	☉	☉	☉	☉
	A2J03	0.04(1.575)	0.025(0.984)	0.16(14.11)	1440	80~180	2.56(14.08)	☉	☉	☉	☉
	A2913	0.043(1.693)	0.025(0.984)	0.2(17.64)	1440	80~180	2.56(14.08)	☉	☉	☉	☉
	A23B2	0.045(1.772)	0.025(0.984)	0.18(16.23)	1440	100~200	3.26(17.95)		☉	☉	☉
	A2K03	0.045(1.772)	0.025(0.984)	0.2(17.64)	1440	80~180	2.56(14.08)	☉	☉	☉	☉
	A25D2	0.05(1.969)	0.028(1.102)	0.2(17.64)	1440	100~200	3.57(19.62)		☉	☉	☉
	A2803	0.05(1.969)	0.028(1.102)	0.2(17.64)	1440	80~180	3.04(16.72)	☉	☉	☉	☉
	A2203	0.054(2.126)	0.028(1.102)	0.2(17.64)	1440	80~180	3.04(16.72)	☉	☉	☉	☉
	A25J2	0.055(2.165)	0.028(1.102)	0.22(19.4)	1440	100~200	3.57(19.62)		☉	☉	☉
	A27A2	0.065(2.559)	0.04(1.575)	0.25(21.87)	1440	100~200	4.49(24.68)		☉	☉	☉
	A2313	0.065(2.559)	0.035(1.378)	0.24(21.16)	1440	80~220	4(22)	☉	☉	☉	☉
	A2992	0.09(3.543)	0.06(2.362)	0.28(24.69)	1440	100~200	6.32(34.76)		☉	☉	☉
	A2413	0.09(3.543)	0.06(2.362)	0.24(21.16)	1440	80~220	6.32(34.76)	☉	☉	☉	☉

★ The data provided herein are measurement only, and are not guaranteed.
★ The thickness allowance is +/- 0.004mm. The backing allowance is +/- 0.002mm.


 Crystal Clear	 Product No.	 Thickness mm(mils)	 Backing mm(mils)	 Adhesion kg/cm(oz/in)	 Holding Power (mins)	 Elongation (%)	 Tensile Strength kg/cm(lbs/in)	 Color	 Printing	 RoHS	 REACH
	S2022	0.04(1.575)	0.025(0.984)	0.14(12.35)	1440	100~200	3.26(17.95)			⊙	⊙
	S2052	0.045(1.772)	0.025(0.984)	0.18(16.23)	1440	100~200	3.26(17.95)			⊙	⊙
	A26W3	0.047(1.85)	0.028(1.102)	0.2(17.64)	1440	80~180	3.04(16.72)			⊙	⊙
	A2W23	0.049(1.929)	0.028(1.102)	0.2(17.64)	1440	80~180	3.04(16.72)			⊙	⊙
	S20A2	0.05(1.969)	0.025(0.984)	0.2(17.64)	1440	100~200	3.26(17.95)			⊙	⊙
	A2W33	0.058(2.283)	0.03(1.181)	0.24(21.16)	1440	80~180	3.2(17.6)			⊙	⊙
	S20C2	0.065(2.559)	0.04(1.575)	0.25(21.87)	1440	100~200	4.49(24.68)			⊙	⊙
	A2W43	0.068(2.677)	0.04(1.575)	0.24(21.16)	1440	80~220	4.8(26.40)			⊙	⊙



★ The data provided herein are measurement only, and are not guaranteed.
★ The thickness allowance is +/- 0.004mm. The backing allowance is +/- 0.002mm.

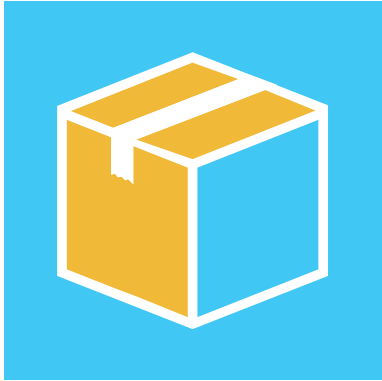

Packaging Tape



 Premium Grade Crystal Clear	 Product No.	 Thickness mm(mils)	 Backing mm(mils)	 Adhesion kg/cm(oz/in)	 Holding Power (mins)	 Elongation (%)	 Tensile Strength kg/cm(lbs/in)	 Application Temperature°C(°F)	 Service Temperature°C(°F)	 RoHS	 REACH	 Remark
	XH23M	0.06(2.36)	0.04(1.57)	0.4(35.27)	15000↑	165	4.8(26.4)	0°C~40°C 32°F~104°F	-10°C~50°C 14°F~122°F	⊙	⊙	• Low Odor • Low VOC
	XH24M	0.08(3.15)	0.06(2.36)	0.4(35.27)	15000↑	210	6.8(37.4)	0°C~40°C 32°F~104°F	-10°C~50°C 14°F~122°F	⊙	⊙	• Low Odor • Low VOC
 Premium Grade	 Product No.	 Thickness mm(mils)	 Backing mm(mils)	 Adhesion kg/cm(oz/in)	 Holding Power (mins)	 Elongation (%)	 Tensile Strength kg/cm(lbs/in)	 Application Temperature°C(°F)	 Service Temperature°C(°F)	 RoHS	 REACH	 Remark
	H2770	0.04(1.57)	0.025(0.98)	0.36(31.75)	10000↑	140	2.8(15.4)	0°C~40°C 32°F~104°F	-10°C~50°C 14°F~122°F	⊙	⊙	-
	H2880	0.043(1.69)	0.028(1.1)	0.36(31.75)	10000↑	140	3.6(19.8)	0°C~40°C 32°F~104°F	-10°C~50°C 14°F~122°F	⊙	⊙	-
	XH28D	0.045(1.77)	0.028(1.1)	0.4(35.27)	10000↑	140	3.6(19.8)	0°C~40°C 32°F~104°F	-10°C~50°C 14°F~122°F	⊙	⊙	-
	H2870	0.048(1.89)	0.028(1.1)	0.4(35.27)	15000↑	140	3.6(19.8)	0°C~40°C 32°F~104°F	-10°C~50°C 14°F~122°F	⊙	⊙	-
	H2310	0.06(2.36)	0.04(1.57)	0.4(35.27)	15000↑	140	4.8(26.4)	0°C~40°C 32°F~104°F	-10°C~50°C 14°F~122°F	⊙	⊙	-
 Superior Grade	 Product No.	 Thickness mm(mils)	 Backing mm(mils)	 Adhesion kg/cm(oz/in)	 Holding Power (mins)	 Elongation (%)	 Tensile Strength kg/cm(lbs/in)	 Application Temperature°C(°F)	 Service Temperature°C(°F)	 RoHS	 REACH	 Remark
	H2D10	0.032(1.26)	0.02(0.79)	0.36(31.75)	6000↑	140	2.6(14.3)	7°C~40°C 45°F~104°F	0°C~50°C 32°F~122°F	⊙	⊙	-


★ The data provided herein are measurement only,and are not guaranteed.

 Superior Grade	 Product No.	 Thickness mm(mils)	 Backing mm(mils)	 Adhesion kg/cm(oz/in)	 Holding Power (mins)	 Elongation (%)	 Tensile Strength kg/cm(lbs/in)	 Application Temperature°C(°F)	 Service Temperature°C(°F)	 RoHS	 REACH
	H2F10	0.035(1.38)	0.022(0.87)	0.36(31.75)	6000↑	140	2.8(15.4)	5°C~40°C 41°F~104°F	-5°C~50°C 23°F~122°F	⊙	⊙
	H2790	0.038(1.5)	0.025(0.98)	0.36(31.75)	6000↑	140	2.8(15.4)	5°C~40°C 41°F~104°F	-5°C~50°C 23°F~122°F	⊙	⊙
	H27B0	0.04(1.57)	0.025(0.98)	0.36(31.75)	6000↑	140	2.8(15.4)	7°C~40°C 45°F~104°F	0°C~50°C 32°F~122°F	⊙	⊙
	H28A0	0.043(1.69)	0.028(1.1)	0.36(31.75)	6000↑	140	3.6(19.8)	7°C~40°C 45°F~104°F	0°C~50°C 32°F~122°F	⊙	⊙
	H2890	0.045(1.77)	0.028(1.1)	0.4(35.27)	10000↑	140	3.6(19.8)	5°C~40°C 41°F~104°F	-5°C~50°C 23°F~122°F	⊙	⊙
	H28F0	0.045(1.77)	0.028(1.1)	0.4(35.27)	6000↑	140	3.6(19.8)	7°C~40°C 45°F~104°F	0°C~50°C 32°F~122°F	⊙	⊙
	H2500	0.07(2.76)	0.05(1.97)	0.4(35.27)	8000↑	180	5.2(28.6)	7°C~40°C 45°F~104°F	0°C~50°C 32°F~122°F	⊙	⊙

 Low Temperature	 Product No.	 Thickness mm(mils)	 Backing mm(mils)	 Adhesion kg/cm(oz/in)	 Holding Power (mins)	 Elongation (%)	 Tensile Strength kg/cm(lbs/in)	 Application Temperature°C(°F)	 Service Temperature°C(°F)	 RoHS	 REACH
	XH28J	0.048(1.89)	0.028(1.1)	0.4(35.27)	10000↑	140	3.6(19.8)	-5°C~40°C 23°F~104°F	-15°C~50°C 5°F~122°F	⊙	⊙
	XH235	0.06(2.36)	0.04(1.57)	0.4(35.27)	10000↑	165	4.8(26.4)	-5°C~40°C 23°F~104°F	-15°C~50°C 5°F~122°F	⊙	⊙

 Printable	 Product No.	 Thickness mm(mils)	 Backing mm(mils)	 Adhesion kg/cm(oz/in)	 Holding Power (mins)	 Elongation (%)	 Tensile Strength kg/cm(lbs/in)	 Application Temperature°C(°F)	 Service Temperature°C(°F)	 RoHS	 REACH
	XH28B	0.043(1.69)	0.028(1.1)	0.36(31.75)	6000↑	140	3.6(19.8)	5°C~40°C 41°F~104°F	-10°C~50°C 14°F~122°F	⊙	⊙
	XH211	0.048(1.89)	0.03(1.18)	0.4(35.27)	10000↑	140	3.6(19.8)	5°C~40°C 41°F~104°F	-10°C~50°C 14°F~122°F	⊙	⊙

★ The data provided herein are measurement only, and are not guaranteed.

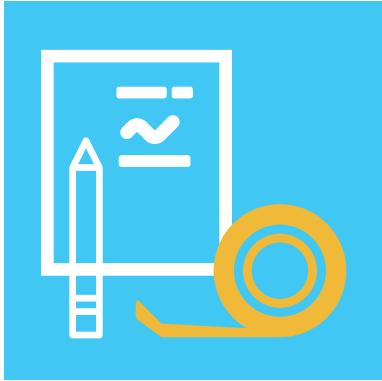

Stationery Tape




 General Use												
	Product No.	Thickness mm(mils)	Backing mm(mils)	Adhesion kg/cm(oz/in)	Elongation (%)	Tensile Strength kg/cm(lbs/in)	Crystal Clear	Color	Easy Tear	Photocopy	RoHS	Remark
	A2N03	0.38(1.5)	0.025(0.98)	0.136(11.99)	80~220	2.56(14.08)		◎			◎	-
	C2362	0.04(1.57)	0.025(0.98)	0.16(14.11)	≤110	1.4~3.2(7.7~17.6)			◎		◎	-
	32532	0.04(1.57)	0.028(1.1)	0.13(11.29)	10~30	2.04(11.22)			◎		◎	-
	A25W3	0.04(1.57)	0.028(1.1)	0.136(11.99)	80~220	3(16.5)	◎	◎			◎	-
	C2062	0.045(1.77)	0.025(0.98)	0.18(16.23)	≤110	1.4~3.2(7.7~17.6)			◎		◎	-
	C20A2	0.045(1.77)	0.025(0.98)	0.18(16.23)	≤110	1.4~3.2(7.7~17.6)			◎		◎	-
	C23B2	0.045(1.77)	0.025(0.98)	0.18(16.23)	≤110	1.4~3.2(7.7~17.6)			◎		◎	-
	323B2	0.045(1.77)	0.025(0.98)	0.18(16.23)	10~30	2.04(11.22)			◎		◎	-
	328M0	0.046(1.81)	0.028(1.1)	0.22(19.4)	140	3.6(19.8)	◎	Light Yellow			◎	• Low Noise
	A2W23	0.049(1.93)	0.028(1.1)	0.2(17.64)	80~220	3(16.5)	◎	◎			◎	-
	C2082	0.05(1.97)	0.025(0.98)	0.2(17.64)	≤110	1.4~3.2(7.7~17.6)			◎		◎	-
	325D2	0.05(1.97)	0.028(1.1)	0.2(17.64)	10~30	2.04(11.22)			◎		◎	-
	32383	0.05(1.97)	0.03(1.18)	0.136(11.99)	50~150	3.2(17.6)		◎			◎	• Matte BOPP

★ The data provided herein are measurement only, and are not guaranteed.
★ The thickness allowance is +/- 0.004mm. The backing allowance is +/- 0.002mm.
★ The adhesive of item listed above are emulsion acrylic, except that "328M0" applies solvent acrylic.

 Writables	 Product No.	 Thickness mm(mils)	 Backing mm(mils)	 Adhesion kg/cm(oz/in)	 Elongation (%)	 Tensile Strength kg/cm(lbs/in)	 Crystal Clear	 Color	 Easy Tear	 Photocopy	 RoHS	 Remark
	S25A2	0.045(1.77)	0.025(0.98)	0.18(16.23)	100~200	3.26(17.95)					⊙	• Matte BOPP • Low unwinding force • Invisible tape
	S25E2	0.05(1.97)	0.025(0.98)	0.2(17.64)	100~200	3.26(17.95)					⊙	• Matte BOPP • Low unwinding force • Invisible tape
	3A103	0.058(2.28)	0.039(1.54)	0.18~0.24(15.87~21.16)	≥20	2(11)			⊙	⊙	⊙	• Acetate • Holding power:≥1000mins
	3A003	0.058(2.28)	0.039(1.54)	0.15~0.24(13.23~21.16)	≥20	2(11)			⊙	⊙	⊙	• Acetate • Low noise • Holding power:≥1000mins
	33003	0.095(3.74)	0.07(2.76)	0.12(10.58)	≥5	2(11)		Lemon Yellow (Opaque)	⊙			• Washi • Repetitive Stick



★ The data provided herein are measurement only, and are not guaranteed.
★ The thickness allowance is +/- 0.004mm. The backing allowance is +/- 0.002mm.
★ The adhesive of item listed above are emulsion acrylic, except that "328M0" applies solvent acrylic.

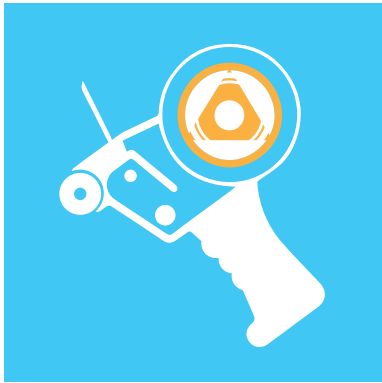

Dispenser

Product Name	Description
SL-206	2"width, 3"core, which can print the private logo
SL-207EZ	2"width, 3"core, which can print the private logo and it has the anti-drop advantages
SL-209	2"width, 3"core, which can print the private logo
SL-213	2"width, 3"core, which can print the private logo

Product Name	Description
SL-326	3"width, 3"core, which can print the private logo
SL-1038	2"width, 3"core, which can print the private logo and it has the elastic blade
SL-3398	3"width, 3"core, which can print the private logo and it has the elastic blade
SL-210	2"width, 3"core, the hand-held is skid resistance

SL-206



SL-207EZ



SL-326



SL-1038



SL-209



SL-213




SL-3398



SL-210



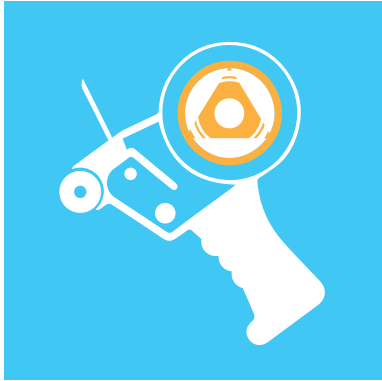


Dispenser


Product Name	Description
SL-821A	2"width, 1.5"core, it's very simplified and convenient
SL-600M	6"width, 3"core, it can apply to the long meters product
SL-7605K	0.5"width, 3"core, which can print the private logo
SL-9518	18"width, 3"core

Product Name	Description
SL-7326	desk top tape dispenser, 1"width with 2pcs combination, 2"core, it can print the private logo
SL-7336	desk top tape dispenser, 1"width with 3pcs combination, 3"core, it can print the private logo
SL-115	desk top tape dispenser, width 19mm, 1"core
SL-135	desk top tape dispenser, width 19mm, 1"core

SL-821A

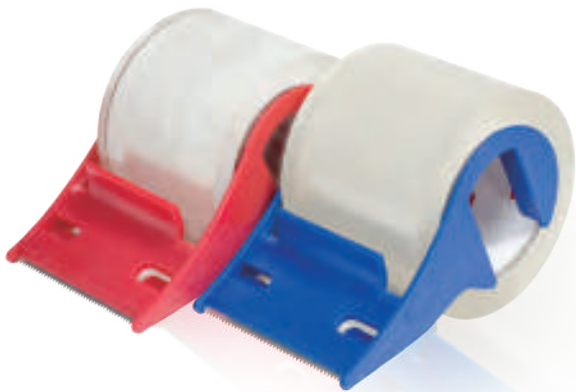

SL-600M

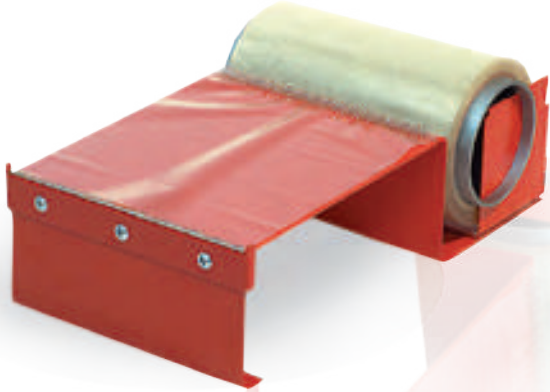

SL-7326



SL-7336



SL-7605K



SL-9518



SL-115



SL-135



PVC Tape Series



Protection Tape
Page 42



Plastering Tape
Page 44



Floor Marking Tape
Page 36



Electrical Tape
Page 30




Automotive Tape
Page 48



Pipe Wrapping Tape
Page 40




Electrical Tape

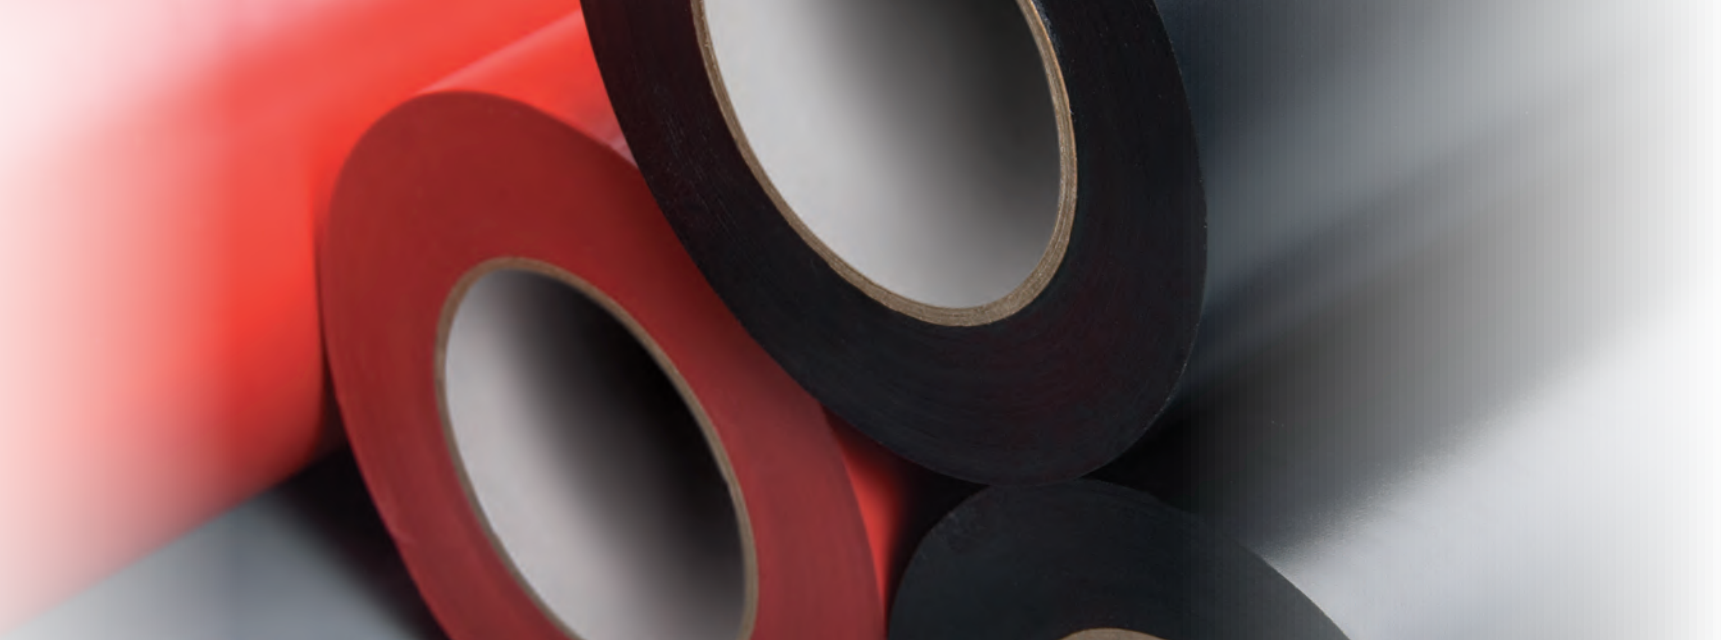

 Product No.	 Thickness mm(mils)	 Adhesion kg/cm(oz/in)	 Tensile Strength kg/cm(lbs/in)	 Elongation(%)	 Dielectric at Break (Volts./mil)	 Surface Finished	 Weather Resistant	 Flame Retardant	 RoHS	 REACH SVHC	 Certification	 Feature/Application
21AG3	0.115±0.011MM (4.50)	0.160↑(14.02)	1.2↑(6.35)	150↑	1011	Glossy			•			•Extremely flexible, good adhesion. •For wire and cable insulation, bundling and reinforcing. •Assorted colors for color coding of cables.
21A51	0.115±0.012 (4.5±0.5)	0.16↑(14)	1.7↑(9)	150↑	1000	Matte			•			
21900	0.120±0.02 (4.72±0.79)	0.180↑(15.78)	2.00↑(11.00)	150↑	1100	Glossy						
21Z00	0.120±0.02 (4.72±0.79)	0.180↑(15.78)	2.00↑(11.00)	150↑	1000	Matte						
K1900	0.120±0.02 (4.72±0.79)	0.180↑(15.78)	2.00↑(11.00)	150↑	1100	Glossy			•			
K1ZB0	0.120±0.02 (4.72±0.79)	0.185↑(16.31)	2.00↑(11.00)	150↑	1000	Matte		•	•	•	•VDE •IEC60454-3-1-1	
K1ZA0	0.120±0.02 (4.72±0.79)	0.180↑(15.78)	2.00↑(11.00)	150↑	1000	Matte		•	•		•VDE •IEC60454-3-1-1	
21A01	0.125±0.013 (4.9±0.5)	0.16↑(14)	1.9↑(10)	150↑	1000	Matte			•			
21G01	0.125±0.013 (4.9±0.5)	0.16↑(14)	1.9↑(10)	150↑	1000	Glossy			•			
21G11	0.125±0.013 (4.9±0.5)	0.16↑(14)	1.9↑(10)	150↑	1000	Glossy		•	•			

Electrical Tape												
 Product No.	 Thickness mm(mils)	 Adhesion kg/cm(oz/in)	 Tensile Strength kg/cm(lbs/in)	 Elongation(%)	 Dielectric at Break (Volts./mil)	 Surface Finished	 Weather Resistant	 Flame Retardant	 RoHS	 REACH SVHC	 Certification	 Feature/Application
21A33	0.125±0.012 (4.891)	0.18↑(15.78)	1.2↑(6.35)	150↑	1011	Glossy			•			•Extremely flexible, good adhesion. •For wire and cable insulation, bundling and reinforcing. •Assorted colors for color coding of cables.
21G13	0.125±0.012 (4.891)	0.18↑(15.78)	1.2↑(6.35)	150↑	1011	Glossy		•	•			
21WA0	0.130±0.02 (5.11±0.79)	0.180↑(15.78)	2.00↑(11.00)	150↑	1000	Matte		•			•IEC 60454-3-1-1	
21000	0.150±0.015 (5.90±0.59)	0.180↑(15.78)	2.60↑(14.00)	200↑	1000	Matte	•					
K1XB0	0.150±0.015 (5.90±0.59)	0.180↑(15.78)	2.55↑(14.00)	150↑	1100	Matte		•	•	•	•VDE •IEC 60454-3-1-5	
21501	0.180±0.018 (7.0±0.7)	0.18↑(16)	2.7↑(15)	150↑	1000	Matte		•	•		•UL •CSA	
K1J01	0.180±0.018 (7.0±0.7)	0.18↑(16)	2.7↑(15)	200↑	1000	Matte	•	•	•	•	•UL •CSA	
21K21	0.180±0.018 (7.0±0.7)	0.18↑(16)	2.7↑(15)	250↑	1000	Matte	•	•	•	•	•UL •CSA	
21103	0.178±0.017 (6.964)	0.180↑(15.78)	2.5↑(13.24)	200↑	1011	Matte			•			
218N0	0.180±0.018 (7.00±0.71)	0.130↑(11.60)	2.60↑(14.00)	200↑	1000	Glossy	•	•			•CSA	
21100	0.180±0.018 (7.00±0.71)	0.180↑(15.78)	2.60↑(14.00)	200↑	1000	Matte					•UL	
211A0	0.180±0.018 (7.00±0.71)	0.180↑(15.78)	2.60↑(14.00)	200↑	1000	Matte		•			•UL	
218M0	0.180±0.018 (7.00±0.71)	0.180↑(15.78)	2.60↑(14.00)	200↑	1000	Glossy					•UL	

Electrical Tape												
 Product No.	 Thickness mm(mils)	 Adhesion kg/cm(oz/in)	 Tensile Strength kg/cm(lbs/in)	 Elongation(%)	 Dielectric at Break (Volts./mil)	 Surface Finished	 Weather Resistant	 Flame Retardant	 RoHS	 REACH SVHC	 Certification	 Feature/Application
211N0	0.180±0.018 (7.00±0.71)	0.180↑(15.78)	2.60↑(14.00)	200↑	1000	Matte	●	●			•UL •CSA	•Premium grade tape. •Extremely flexible, good adhesion. For wire and cable insulation, bundling and reinforcing. •Assorted colors for color coding of cables.
XK18A	0.180±0.018 (7.00±0.70)	0.180↑(15.78)	2.60↑(14.00)	150↑	1000	Matte	●	●	●	●	•IEC 60454-3-1-6 •REACH	•Extremely flexible, good adhesion. •For wire and cable insulation, bundling and reinforcing. •Assorted colors for color coding of cables.
K11G0	0.180±0.018 (7.00±0.71)	0.210↑(18.6)	2.60↑(14.00)	200↑	1000	Glossy	●	●	●		•UL •CSA	•Extremely flexible, good adhesion. •For wire and cable insulation, bundling and reinforcing. •Assorted colors for color coding of cables. •Pass UL 94 burning test VTM-0.
K11M0	0.180±0.018 (7.00±0.71)	0.180↑(15.78)	2.60↑(14.00)	200↑	1000	Matte	●	●	●	●	•UL •CSA •-18°C to 105°C	•Premium grade tape. •Extremely flexible, good adhesion. •For wire and cable insulation, bundling and reinforcing.
K11N0	0.180±0.018 (7.00±0.71)	0.180↑(15.78)	2.60↑(14.00)	200↑	1000	Matte	●	●	●		•UL •CSA •-18°C to 105°C	•Assorted colors for color coding of cables. •Pass FMVSS302.
K11A0	0.180±0.018 (7.00±0.71)	0.180↑(15.78)	2.60↑(14.00)	--	1000	Matte		●	●		•UL	•Extremely flexible, good adhesion. •For wire and cable insulation, bundling and reinforcing. •Assorted colors for color coding of cables.
K1100	0.180±0.018 (7.00±0.71)	0.180↑(15.78)	2.60↑(14.00)	200↑	1000	Matte			●		•UL	
XK18B	0.190±0.019 (7.50±0.75)	0.180↑(15.78)	2.70↑(14.7)	150↑	1000	Matte	●	●	●	●	•IEC 60454-3-6 •REACH	
212A0	0.200±0.02 (8.00±0.020)	0.180↑(15.78)	3.10↑(17.60)	200↑	1000	Matte		●			•UL	
21400	0.200±0.02 (8.00±0.020)	0.130↑(11.60)	3.10↑(17.60)	200↑	1000	Glossy						
K1450	0.200±0.02 (8.00±0.79)	0.160↑(14.40)	1.85~3.40 (10.35~19.16)	100~300	1000	Glossy	●	●	●	●	•JIS	
K1GC0	0.210±0.02 (8.27±0.79)	0.110↑(9.90)	3.20↑(17.90)	200↑	1000	Matte	●	●	●			
K1GB0	0.220±0.022 (8.66±0.87)	0.210↑(18.6)	3.10↑(17.60)	200↑	900	Matte	●	●	●		•UL •CSA •-18°C to 105°C	
K1QB0	0.220±0.022 (8.66±0.87)	0.210↑(18.6)	3.10↑(17.60)	200↑	900	Glossy	●	●	●		•UL •CSA •-18°C to 105°C	

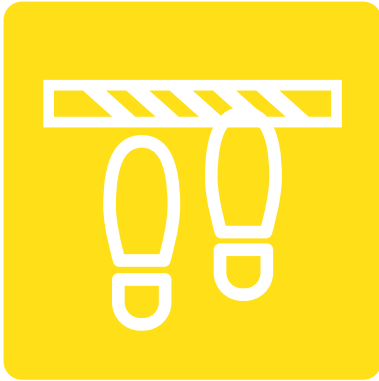

Floor Marking Tape




 Product No.	 Thickness mm(mils)	 Adhesion kg/cm(oz/in)	 Tensile Strength kg/cm(lbs/in)	 Elongation(%)	 Feature/Application
41W00	0.130±0.013(5.1±0.51)	0.16↑(14.11)	2.0↑(11.00)	150↑	•It is designed for industrial identification, color coding, lane mark and bundling. •Matte finished.
41W03	0.130±0.013(5.1±0.51)	0.20↑(17.640)	1.6↑(14.000)	150↑	It is designed for floor or aisle marking and pipe wrapping.
X1M03	0.150±0.015(5.9±0.59)	0.14↑(12.401)	1.8↑(10.000)	175↑	•It is designed for industrial identification, color coding, lane mark and bundling. •Glossy finished.
X1003	0.150±0.015(5.9±0.59)	0.14↑(12.401)	1.8↑(10.000)	175↑	
41061	0.135±0.013(5.3±0.5)	0.16↑(14)	2.0↑(11)	150↑	•It is designed for industrial identification, color coding, lane mark and bundling. •Glossy finished, easy unwind.
41N51	0.135±0.013(5.3±0.5)	0.16↑(14)	2.0↑(11)	150↑	•Hazard warning. •Duo colors available.
41050	0.140±0.014(5.50±0.55)	0.14↑(12.40)	2.6↑(14.00)	150↑	•It is designed for industrial identification, color coding, lane mark and bundling. •Glossy finished, easy unwind.
41000	0.150±0.015(5.90±0.59)	0.20↑(17.64)	2.6↑(14.00)	180↑	•It is designed for industrial identification, color coding, lane mark and bundling. •Glossy finished. •Duo colors available.
41900	0.150±0.015(5.90±0.59)	0.20↑(17.64)	2.6↑(14.00)	150↑	•It is designed for industrial identification, color coding, lane mark and bundling. •Matte finished.

Floor Marking Tape					
 Product No.	 Thickness mm(mils)	 Adhesion kg/cm(oz/in)	 Tensile Strength kg/cm(lbs/in)	 Elongation(%)	 Feature/Application
41933	0.150±0.015(5.90±0.59)	0.20(17.64)	1.8↑(10.00)	175↑	It is designed for floor or aisle marking and pipe wrapping.
41N00	0.160±0.017(6.60±0.67)	0.13↑(11.30)	2.60↑(14.00)	200↑	•It is designed for industrial identification, color coding, lane mark and bundling. •Glossy finished. •Duo colors.
41110	0.160±0.016(6.60±0.63)	0.20↑(17.64)	3.10↑(17.60)	150↑	•Laminated version with duo colors printing: white/red, white/green and yellow/black. •It is designed for industrial identification, color coding, lane mark and bundling. •Glossy finished.
41131	0.160±0.016(6.3±0.6)	0.16↑(14)	2.4↑(13)	150↑	•It is designed for industrial identification, color coding, lane mark and bundling. •Glossy finished.
41N41	0.160±0.016(6.3±0.6)	0.16↑(14)	2.4↑(13)	150↑	•Hazard warning. •Duo colors available.
X1M63	0.170±0.017(7.012±0.701)	0.20↑(17.64)	2.80↑(18.95)	200↑	•It is designed for industrial identification, color coding, lane mark and bundling. •Glossy finished. •Duo colors.
41V00	0.230±0.023(9.10±0.91)	0.24↑(21.16)	5.91↑(33.04)	200↑	•Laminated version with duo colors printing: white/red, white/green and yellow/black. •It is designed for industrial identification, color coding, lane mark and bundling. •Glossy finished.





Pipe Wrapping Tape

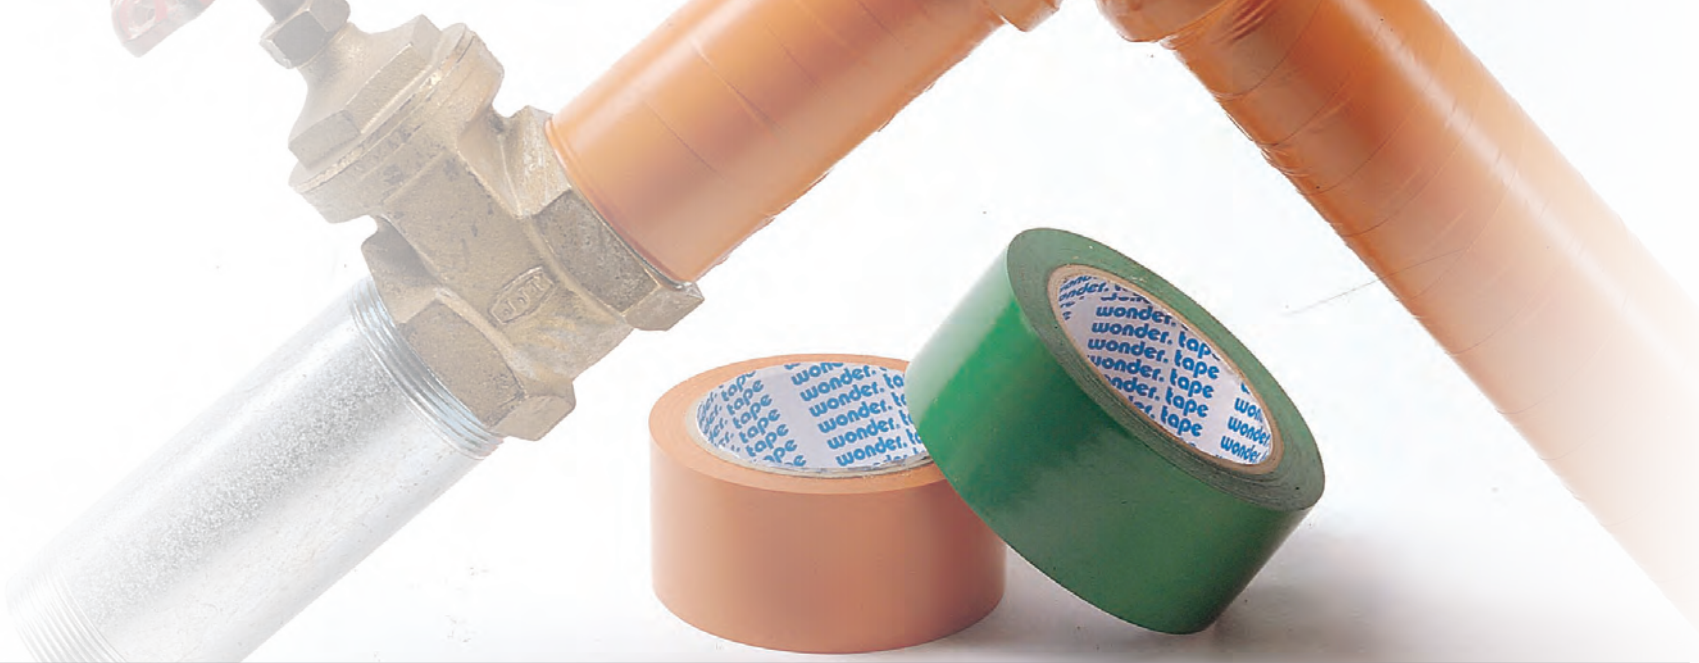

 Product No.	 Thickness mm(mils)	 Adhesion kg/cm(oz/in)	 Tensile Strength kg/cm(lbs/in)	 Elongation(%)	 Feature/Application
41811	0.130±0.013(5.1±0.5)	0.16↑(14)	2.0↑(11)	150↑	•Suitable for industrial purpose; Watertight,moisture-resistant, good for duct sealing, reinforcing, mending and other applications. •Glossy finished.
418A1	0.130±0.013(5.1±0.5)	0.16↑(14)	2.0↑(11)	150↑	•Suitable for industrial purpose; Watertight,moisture-resistant, good for duct sealing, reinforcing, mending and other applications. •Glossy finished. •Flame retardant.
41800	0.130±0.020(5.11±0.79)	0.160↑(14.11)	2.00↑(11.00)	200↑	•Suitable for industrial purpose; Watertight,moisture-resistant, good for duct sealing, reinforcing, mending and other applications. • Glossy finished.
41100	0.160±0.016(6.60±0.63)	0.160↑(14.11)	2.60↑(14.00)	200↑	
41700	0.170±0.017(6.69±0.67)	0.200↑(17.64)	2.00↑(11.00)	100↑	•Suitable for industrial purpose; Watertight,moisture-resistant, good for duct sealing, reinforcing, mending and other applications. •Embossed.
11433	0.170±0.017(6.69±0.67)	0.130↑(11.466)	2.000↑(10.588)	175↑	•Suitable for industrial purpose; Watertight,moisture-resistant, good for duct sealing, reinforcing, mending and other applications. •Embossed. •ROHS1.0
41200	0.200±0.020(8.00±0.79)	0.160↑(14.11)	3.10↑(17.60)	200↑	•Suitable for industrial purpose; Watertight,moisture-resistant, good for duct sealing, reinforcing, mending and other applications. •Matte finished.
41300	0.250±0.025(10.00±0.98)	0.180↑(15.87)	3.50↑(19.80)	150↑	•UPC/IAPMO listed, heavy duty pipe wrapping, moisture resistant, anti-corrosive. •Matte Finished.
41500	0.500±0.050(20.00±1.97)	0.180↑(15.87)	7.20↑(40.0)	150↑	
XV151	0.500±0.050(20.00±1.97)	0.180↑(15.87)	7.20↑(40.0)	150↑	•Suitable for industrial purpose; Watertight,moisture-resistant, good for duct sealing, reinforcing, mending and other applications. •REACH SVHC/RoHS compliance.




Protection Tape



 Product No.	 Thickness mm(mils)	 Adhesion kg/cm(oz/in)	 Tensile Strength kg/cm(lbs/in)	 Elongation(%)	 Feature/Applicvtion
51801	0.110±0.011(4.3±0.4)	0.16↑(14)	1.8↑(10)	150↑	•Medium tack. •Protecting aluminum or plastic window.
51811	0.115±0.012(4.5±0.5)	0.16↑(14)	1.8↑(10)	150↑	
51800	0.120±0.020(4.70±0.79)	0.08~0.14(7.05~13.30)	2.00↑(11.00)	150↑	Medium tack surface protection for general materials like metal/aluminum/plastic/ wooden window frame.
518S0	0.130±0.013(5.11±0.51)	0.120↑(10.50)	2.10↑(11.50)	180↑	•Easy unwind. •Surface protection for general materials like metal/aluminum/plastic/wooden window frame.
W18S0	0.130±0.013(5.11±0.51)	0.120↑(10.50)	2.10↑(11.50)	180↑	•Easy unwind. •Surface protection for general materials like metal/aluminum/plastic/wooden window frame.
51CA0	0.150±0.015(5.90±0.59)	0.100~0.180(8.80~15.80)	2.00↑(11.00)	200↑	•Surface protection for general materials like metal/aluminum/plastic/wooden window frame. •Printable.



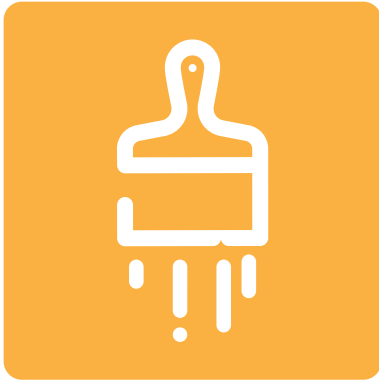

Plastering Tape



PVC Plastering Tape

 Product No.	 Thickness mm(mils)	 Adhesion kg/cm(oz/in)	 Tensile Strength kg/cm(lbs/in)	 Elongation(%)	 Unwinding Force (g/25mm)	 Feature/Application	 Remark
W18Y0	0.120±0.012(4.70±0.47)	0.120↑(10.50)	2.10↑(11.50)	180↑	300~900	•Weather resistance. •RoHS & REACH compliance. •Easy-unwind protective tape. •Limited UV resistance. •Ideal for masking aluminum UPVC, painted wooden window and door frames.	REACH
XW19S	0.120±0.012(4.70±0.47)	0.120↑(10.60)	2.00↑(11.00)	150↑	50~450	•Premium grade. •Weather resistance. •RoHS & REACH SVHC compliance. •High tack protective tape. •Limited UV resistance. •Ideal for masking aluminum UPVC, painted wooden window and door frames.	REACH SVHC
K18G3	0.120±0.012(4.702±0.470)	0.120↑(10.501)	2.100↑(11.503)	180↑	300~1125	•Ideal for masking aluminum UPVC and painted wooden window and door frames. •REACH SVHC.	
W18G0	0.130±0.020(5.10±0.79)	0.144↑(12.70)	2.00↑(11.00)	180↑	--	•Weather resistance. •RoHS & REACH SVHC compliance. •High tack protective tape. •Limited UV resistance. •Ideal for masking aluminum UPVC, painted wooden window and door frames.	REACH SVHC
61G10	0.140±20(5.51±0.79)	(Green side) 0.28(24.67) (White side) 0.16~0.31(14.10~28.19)	2.00↑(11.00)	100↑	--	Professional duoband tape.	REACH SVHC
51H03	0.150±0.028(5.902±1.18)	0.100↑(8.810)	1.602↑(9.050)	110↑	300~1125	•Embossed, easy-tear. •Ideal for masking aluminum UPVC and painted wooden window and door frames.	EASY TEAR
51CA0	0.150±0.015(5.90±0.59)	0.100~0.180(8.80~15.80)	2.00↑(11.00)	200↑	--	•Printable & high tack protective tape. •Used to protect aluminum board surface during manufacturing process. Ideal for protecting aluminum or plastic windows.	REACH SVHC

PVC Plastering Tape							
 Product No.	 Thickness mm(mils)	 Adhesion kg/cm(oz/in)	 Tensile Strength kg/cm(lbs/in)	 Elongation(%)	 Unwinding Force (g/25mm)	 Feature/Application	 Remark
51H20	0.150±0.03(5.90±1.18)	0.100↑(8.80)	1.60↑(8.80)	110↑	--	•Embossed easy tear protective tape. •Weather resistance. •RoHS & REACH SVHC compliance. •Limited UV resistance. •Ideal for masking aluminum UPVC, painted wooden window and door frames.	REACH SVHC, EASY TEAR
11411	0.150±0.015(5.9±0.59)	0.16↑(14)	1.8↑(10)	100↑	--	Bundling and paint masking(wooden or aluminum door & window frame).	EASY TEAR

PE Plastering Tape									
 Product No.	 Thickness mm(mils)	 Adhesion kg/cm(oz/in)	 Tensile Strength kg/cm(lbs/in)(MD)	 Elongation(%) (MD)	 Tensile Strength kg/cm(lbs/in)(CD)	 Elongation(%) (CD)	 Unwinding Force (g/25mm)	 Feature/Application	 Remark
X5786	85±5(3.35±0.19)	0.18↑(15.87)	0.98↑(5.51)	200↑	0.79↑(4.41)	350↑	--	•Easy tear. •This tape is remains resistant to UV-rays. •This tape is ideal for delicate surfaces.	EASY TEAR
X5702	95±5(3.75±0.19)	0.24↑(21.16)	0.98↑(5.51)	200↑	0.79↑(4.41)	350↑	--		EASY TEAR





Automotive



Wire Harness Tape

 Product No.	 Thickness mm(mils)	 Adhesion kg/cm(oz/in)	 Tensile Strength kg/cm(lbs/in)	 Elongation(%)	 Unwinding Force (g/25mm)	 Dielectric at Break (Volts./mil)	 Application Temp (°C)	 Feature/Application
ZK17A	0.090±0.01 (3.5±0.35)	0.105↑(9.29)	1.9↑(10.50)	150↑	520↑	1000↑	--	•Soft and flexible, good workability on automotive wiring harness. •Meets VW 60360-1-5.5. •FMVSS302 Passed. •REACH/RoHS Compliance.
21L61	0.100±0.010 (3.9±0.4)	0.12↑(10)	1.4↑(8)	150↑	--	1000↑	80°C	•Flame retardant. •RoHS Compliance. •Soft and flexible, good workability on automotive wiring harness.
21L91	0.100±0.010 (3.9±0.4)	0.12↑(10)	1.4↑(8)	150↑	--	1000↑	80°C	
21LB1	0.100±0.010 (3.9±0.4)	0.16↑(14)	1.4↑(8)	150↑	500↑	1000↑	80°C	•Flame retardant. Heavy duty. •RoHS Compliance. •Soft and flexible, good workability on automotive wiring harness.
ZK1TA	0.100±0.01 (3.9±0.39)	0.105↑(9.29)	2.2↑(12.17)	150↑	520↑	1000↑	125°C	•Soft and flexible, good workability on automotive wiring harness. •Meets VW 60360-1-5.5. •FMVSS302 Passed. •REACH/RoHS Compliance.
21Y83	0.100±0.01 (3.9±0.39)	0.095↑(8.400)	1.400↑(7.508)	150↑	300↑	1011↑	80°C	•Flame retardant. •Soft and flexible, good workability on automotive wiring harness. •REACH/RoHS Compliance.

Wire Harness Tape								
 Product No.	 Thickness mm(mils)	 Adhesion kg/cm(oz/in)	 Tensile Strength kg/cm(lbs/in)	 Elongation(%)	 Unwinding Force (g/25mm)	 Dielectric at Break (Volts./mil)	 Application Temp (°C)	 Feature/Application
K1L13	0.115±0.011 (4.50)	0.12(10.67)	1.4↑(7.41)	150↑	450↑	1011↑	80°C	•Flame retardant. •Soft and flexible, good workability on automotive wiring harness. •REACH/RoHS Compliance.
21Y01	0.115±0.012 (4.5±0.5)	0.16(14)	1.4↑(8)	150↑	--	1000↑	80°C	•Flame retardant. •RoHS1.0 Compliance. •Soft and flexible, good workability on automotive wiring harness.
21L13	0.115±0.011 (4.50)	0.16(14.02)	1.4↑(7.41)	150↑	590↑	1011↑	80°C	•Flame retardant. Heavy duty. •RoHS Compliance. •Soft and flexible, good workability on automotive wiring harness.
21Y21	0.115±0.012 (4.5±0.5)	0.18(16)	1.4↑(8)	150↑	--	1000↑	105°C	•Flame retardant. •RoHS Compliance. •Soft and flexible, good workability on automotive wiring harness.
21Y41	0.115±0.012 (4.5±0.5)	0.18(16)	1.4↑(8)	150↑	--	1000↑	136°C	
21Y51	0.120±0.012 (4.7±0.5)	0.16(14)	1.6↑(9)	150↑	--	1000↑	80°C	
21Y33	0.125±0.012 (4.89)	0.16(14.02)	1.4↑(7.41)	175↑	590↑	1011↑	136°C	•Flame retardant. •RoHS1.0 Compliance. •Soft and flexible, good workability on automotive wiring harness.
21Y23	0.125±0.012 (4.89)	0.16(14.023)	1.4↑(7.41)	175↑	590↑	1011↑	105°C	
21563	0.165±0.017 (6.765±0.676)	0.18(15.78)	2.4↑(12.7)	175↑	590↑	1011↑	80°C	



PET-NON Woven Wire Harness

 Product No.	 Thickness mm(mils)	 Adhesion kg/cm(oz/in)	 Tensile Strength kg/cm(lbs/in)	 Elongation(%)	 Unwinding Force (g/25mm)	 Dielectric at Break (Volts./mil)	 Application Temp (°C)	 Feature/Application	 Remark
K5A00	0.18±0.02 (7.09±0.79)	0.263↑(23.27)	6↑(33.18)	20↑	--	--	105°C	•Low odor, low fogging and low VOCs emission. •Excellent anti-abrasion properties and flame resistance. •Easy tear. •Wire harness bundling in the passenger compartment of an automobile.	Meet LV-312 VW60360-1 standard
K5AZ0	0.25±0.05 (9.84±1.97)	0.263↑(23.27)	6↑(33.18)	20↑	--	--	150°C	•Extreme low VOCs ` high temperature resistance. •Excellent aging resistance and stable against rotting. •Wire harness bundling in high temperature area like engine compartment.	Meet LV-312 VW60360-1 standard
K5100	0.28±0.04 (11.02±1.57)	0.263↑(23.27)	4↑(22.12)	17↑	--	--	105°C	•Low odor, low fogging and low VOCs emission. •Excellent sound dampening, anti-abrasion properties and flame resistance. •Easy tear / Wire harness bundling in the passenger compartment of an automobile.	Meet LV-312 VW60360-1 standard
K51Z0	0.30±0.05 (11.81±1.97)	0.158↑(13.98)	4↑(22.12)	17↑	--	--	125°C	•Extreme low VOCs ` high temperature resistance. •Easy tear. •Wire harness bundling in the passenger compartment of an automobile.	Meet LV-312 VW60360-1 standard

Fine Line

 Product No.	 Thickness mm(mils)	 Adhesion kg/cm(oz/in)	 Tensile Strength kg/cm(lbs/in)	 Elongation(%)	 Unwinding Force (g/25mm)	 Dielectric at Break (Volts./mil)	 Application Temp (°C)	 Feature/Application
X3981	0.120±0.012 (4.7±0.5)	0.16(14)	1.4(8)	120	--	--	150°C	•Easy tear PVC film. •Used for painting masking especially for arc curve color division. •Temperature resistance of up to 150°C*1 hour.
X3931	0.120±0.012 (4.7±0.5)	0.16(14)	1.4(8)	150	--	--	150°C	•Flexible PVC film. •Used for painting masking especially for arc curve color division. •Temperature resistance of up to 150°C*1 hour.

Low-VOC PVC Adhesive Tapes


Low-VOC PVC Adhesive Tapes								
 Product No.	 Thickness mm(mils)	 Adhesion kg/cm(oz/in)	 Tensile Strength kg/cm(lbs/in)	 Elongation(%)	 Dielectric at Break (Volts./mil)	 Operating Temp (°C)	 Flammability Rating	 Feature/Application
1V1060W	0.135 (5.31)	0.12 (10.58)↑	3.0 (16.2)↑	180↑	---	-10°C~ 60°C	---	For industrial identification, color coding and duct wrapping purpose. Ideal for floor or aisle marking. REACH and RoHS Compliance.
1K1S30W	0.130 (5.1)	0.1 (9.3) ↑	1.6 (8.8) ↑	150 ↑	1000 ↑	80°C	---	Soft and flexible, good workability on automotive wiring harness. REACH and RoHS Compliance.
1Z21910W	0.115 (4.5)	0.16 (14.3)↑	0.79 (4.4)↑	100↑	800 ↑	-10°C~ 80°C	---	Suit for Top-grafting Pears REACH and RoHS Compliance.
1ZK17AW	0.09 (3.5)	0.105 (9.29) ↑	1.9 (10.5) ↑	150 ↑	1000 ↑	105°C	B	Soft and flexible, good workability on automotive wiring harness. Flame retardant. REACH and RoHS Compliance.
1ZK17BW	0.08 (3.1)	0.087 (7.76) ↑	1.4 (7.74) ↑	150 ↑	1000 ↑	80°C	B	Soft and flexible, good workability on automotive wiring harness. Flame retardant. REACH and RoHS Compliance.
ZK1TB	0.100 (3.9)	0.095 (8.40) ↑	1.4 (7.74) ↑	150 ↑	1000 ↑	80°C	B	Soft and flexible, good workability on automotive wiring harness. Flame retardant. REACH and RoHS Compliance.
ZK1TC	0.100 (3.9)	0.095 (8.40) ↑	1.4 (7.74) ↑	150 ↑	1000 ↑	80°C	B	Soft and flexible, good workability on automotive wiring harness. Flame retardant. REACH and RoHS Compliance.
ZK1TD	0.100 (3.9)	0.068 (6.01) ↑	1.4 (7.74) ↑	150 ↑	1000 ↑	80°C	B	Soft and flexible, good workability on automotive wiring harness. Flame retardant. REACH and RoHS Compliance.
ZK1TA	0.100 (3.9)	0.105 (9.29) ↑	2.2 (12.17) ↑	150 ↑	1000 ↑	105°C	B	Soft and flexible, good workability on automotive wiring harness. Flame retardant. REACH and RoHS Compliance.
ZK1ZB	0.125 (4.9)	0.105 (9.29) ↑	2.6 (14.38) ↑	150 ↑	1000 ↑	105°C	B	Soft and flexible, good workability on automotive wiring harness. Flame retardant. REACH and RoHS Compliance.

Low-VOC PVC Adhesive Tapes

 Product No.	 Thickness mm(mils)	 Adhesion kg/cm(oz/in)	 Tensile Strength kg/cm(lbs/in)	 Elongation(%)	 Unwinding Force(g/25mm)	 Dielectric at Break (Volts./mil)	 Operating Temp (°C)	 Flammability Rating	 Feature/Application
K109W	0.090(3.54)	0.10(8.82)↑	1.75(9.65)↑	150↑	320↑	1000↑	85°C	B	Soft and flexible, good workability on automotive wiring harness. Flame retardant. REACH and RoHS Compliance.
K110W	0.100(3.94)	0.10(8.82)↑	1.75(9.65)↑	150↑	320↑	1000↑	85°C	B	
K111W	0.100(3.94)	0.10(8.82)↑	1.75(9.65)↑	150↑	320↑	1000↑	125°C	B	
K115W	0.150(5.91)	0.10(8.82)↑	1.75(9.65)↑	150↑	390↑	1000↑	85°C	B	
K123W	0.130(5.12)	0.10(8.82)↑	1.75(9.65)↑	150↑	390↑	1000↑	125°C	B	
K133W	0.110(4.33)	0.10(8.82)↑	1.75(9.65)↑	150↑	390↑	1000↑	125°C	B	
K1A3W	0.100(3.94)	0.10(8.82)↑	1.75(9.65)↑	150↑	260-590	1000↑	125°C	B	
K1B3W	0.085(3.35)	0.10(8.82)↑	1.75(9.65)↑	150↑	260-590	1000↑	125°C	B	
ZK1T1	0.100(3.94)	0.125(11.02)↑	1.75(9.65)↑	150↑	390↑	1000↑	85°C	B	
K1T1W	0.100(3.94)	0.125(11.02)↑	1.75(9.65)↑	150↑	390↑	1000↑	105°C	B	
K1TAW	0.100(3.94)	0.125(11.02)↑	2.04(11.24)↑	150↑	520↑	1000↑	105°C	B	




Multifunction Series



Overlamine Tape
Page 66



Double Sided Tape
Page 56



Special Tape
Page 64




PE Protection Tape
Page 68



Glue
Page 70



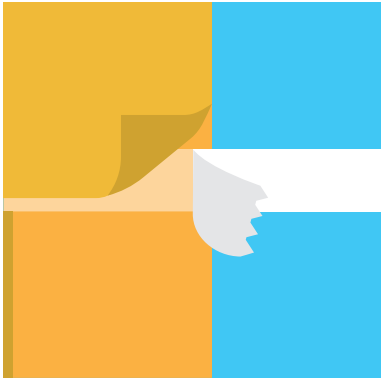

Double Sided Tape



 Product No.	 Thickness (mm)	 Adhesion (kg/cm)	 Operating Temp	 Elongation (%)	 Tensile Strength (lbs/in)	 RoHS	 REACH SVHC 235	Release Liner	 Description/Application
Acrylic Adhesive									
Tissue Carrier - General type									
63200	0.085	0.4	-25~65°C	2.0	4.4	◎	◎	114um white PE coated paper	• General purpose, double coated tissue paper tape • Two sided coating of acrylic-based, pressure sensitive adhesive • General purpose splicing of materials like paper, films, foils and corrugated paper. • Designed for general purpose including stationery, envelopes and decorative sheets.
63Q00	0.09	0.4	-25~65°C	2.0	4.4	◎	◎		
63300	0.1	0.4	-25~65°C	2.0	4.4	◎	◎		
Tissue Carrier - Premium type									
63H00	0.13	0.4	-25~80°C	2.0	4.4	◎	◎	114um White PE Coated Paper	• High Adhesion & excellent initial tack. • RoHS & REACH compliance • Multi-purpose adhesive is suitable for paper splicing, gasket materials, felt, textiles, posters and print finishing applications. • Mounting of name plates and plastic in trophy industry • Splicing of irregular or textured surfaces such as heavy papers or corrugated board
63230	0.13	0.6	-25~80°C	2.0	4.4	◎	◎		
Tissue Carrier - Temperature-resistance									
63R10	0.13	0.6	-40~150°C	2.0	4.4	◎	◎	114um white PE coated paper	• Premium grade • Wide range of temperture tolerance • UL certificate • Splicing of irregular or textured surfaces such as heavy papers or corrugated board • Excellent long life durability when attached to metal, plastics, semi porous foam & high surface energy substrates.
X63R3	0.15	0.68	-40~150°C	2.0	4.4	◎	◎		
63R00	0.17	0.8	-40~150°C	2.0	4.4	◎	◎	141um White PE Coated Paper	

★ Capable of providing with FSC standard materials.

★ The data provided herein are measurement only, and are not guaranteed.


 Product No.	 Thickness (mm)	 Adhesion (kg/cm)	 Operating Temp	 Elongation (%)	 Tensile Strength (lbs/in)	 RoHS	 REACH SVHC 235	Release Liner	 Description/Application
Tissue Carrier - High initial TACK for LSE materials									
X6311	0.130	0.80	-40~150°C	100	4.4	⊙	⊙	141um white PE coated paper	• Premium grade • High adhesion & excellent initial tack • RoHS & REACH compliance • High level of adhesion to LSE materials such as Polypropylene and some Polyethylenes as well as coated papers and varnishes. • Excellent long life durability when attached to metal, plastics, semi porous foam & high surface energy substrates. • Multi-purpose adhesive is suitable for paper splicing, gasket materials, felt, textiles, posters and print finishing applications. • X6311 is specially designed for car curtain bonding and related industries use.
X631A	0.160	0.88	-40~150°C	100	4.4	⊙	⊙		
SPVC carrier - General type									
61000	0.22	0.6	-25~80°C	100	11	⊙	-	114um White PE Coated Paper	• Soft PVC carrier (0.12mm white). • RoHS complaince • Used for secure attachment of extruded plastic profiles in furniture and general industries and to mount signs and large format graphics. • Recommended for bonding trims in automotive and other industries.
SPVC carrier - High tack/low tack double sided tape									
X61G1	0.14	Close: 0.28 (Green) Open: 0.16~0.32 (White)	-25~65°C	100	11	⊙	-	114um White PE Coated Paper	• Soft PVC carrier (0.08mm white). • High Tack/Low Tack Double Sided Tape • Zone coating with finger-lift release liner • RoHS & REACH compliance• Suitable for Building and construction masking such as doors and windows and protection of rough sufrage. • A unique double sided tape for safe but secure temporary attachment to delicate floors, walls, windows and more. • Be re-positioned and will not leave a residue on most surfaces.
PET Carrier - Removable repositionable double coated tape									
X6431	0.128	open: 0.72 close: 0.32	-40~150°C	85	11	⊙	⊙	114um White PE Coated Paper	• High performance double coated 23um PET film tape • Open side coated 80um heavy duty modified acrylic-based adhesive/ Close side coated 30um acrylic adhesive • Strong permanent adhesive on Open side, and a repeadly removable adhesive on Close side. • The open side of tape allows attachment to many materials including metals and the majority of plastics. • The close side of tape made for easily repositioned without leaving residue on most surfaces • Designed versatile for various applications needing dual adhesion levels.
X643M	0.063	0.48	-40~150°C	85	11	⊙	⊙	114um White PE Coated Paper	• High performance double coated 23um PET film tape • Faceside coated 27um modified acrylic-based adhesive/ backside coated 13um modified acrylic adhesive. • For applications where one part needs to be repositioned or removed easily without residue. • Electronic devices Parts assembly and optical film fixation of display products.

 Product No.	 Thickness (mm)	 Adhesion (kg/cm)	 Operating Temp	 Elongation (%)	 Tensile Strength (lbs/in)	 RoHS	 REACH SVHC 235	Release Liner	 Description/Application
PET carrier - Modefied acrylic-based									
X4920	0.05	1.2	-40~150°C	75	12.1	⊙	⊙	114um White PE Coated Paper	• Double coated 12um PET film tape with modefied acrylic-based adhesive. • High adhesion level with relative to low thickness. • Premium grade for general and indusrtial purpose. • Excellent handling performance in converting processes. • High quality and trong holding power allows for using on varity of surfaces including metals and the majority of plastics.
PET carrier - Temperture resistance									
X6470	0.12	1.3	-40~150°C	75	12.1	⊙	⊙	114um White PE Coated Paper	• Premium grade, double coated 12um PET film tape • Designed for all-weather and cold temperature purpose • Capable of performing even in temperatures as low as -10°C • Mounting smooth surface substrates in cold temperatures (such as freezers) • Often used in commercial construction and metal building insulation applications, the double-sided PET tape is also versatile enough for a broad range of environmental conditions.
64130	0.09	0.4	-25~65°C	75	12.1	⊙	⊙	114um White PE Coated Paper	• Premium grade, double coated 12um PET film tape • RoHS & REACH compliance • General industrial purposes including metals and plastics, nameplates and more • Suitable for Shoe industries, cloth and some electronic industries
64H00	0.13	0.48	-25~80°C	85	23.2	⊙	⊙	114um White PE Coated Paper	• Premium grade, double coated 23um PET film tape • RoHS & REACH compliance • Offers excellent processability, dimensional stability and workability. • Splicing of irregular or textured surfaces such as heavy papers or corrugated board
64120	0.09	0.4	-40~65°C	75	12.1	⊙	⊙	114um White PE Coated Paper	• Premium grade, double coated 12um PET film tape • RoHS & REACH compliance • General industrial purposes including metals and plastics, nameplates and more • Suitable for Shoe industries, cloth and some electronic industries • Low temperature formula
64150	0.09	0.51	-40~65°C	75	12.1	⊙	⊙	114um White PE Coated Paper	• Premium grade, double coated 12um PET film tape • RoHS & REACH compliance • General industrial purposes including metals and plastics, nameplates and more • Suitable for Shoe industries, cloth and some electronic industries • Low temperature formula
64B00	0.17	0.6	-40~150°C	75	12.1	⊙	⊙	114um White PE Coated Paper	• Premium grade, double coated 12um PET film tape • RoHS & REACH compliance • Provides excellent adhesiveness to a wide variety of substrates with wide temperature tolerance. • Rough foams, Nylon, PE and PP, name plates, automotive industry and electronics industry

★ The data provided herein are measurement only, and are not guaranteed.

 Product No.	 Thickness (mm)	 Adhesion (kg/cm)	 Operating Temp	 Elongation (%)	 Tensile Strength (lbs/in)	 RoHS	 REACH SVHC 235	Release Liner	 Description/Application	
PET carrier- 80um RED MOPP liner										
64320	0.205	0.88	0~150°C	85	23.2	⊙	⊙	80µm Red MOPP	• Premium grade, double coated 23um PET film tape • Special modified acrylic formula for LSE materials • RoHS & REACH compliance • Bonds to difficult surfaces including board, fabrics, vinyl, plastics and rubber. • Suitable for foam lamination, converting and die cut process • Used for signs, nameplates, plastic and rubber extrusions, arts and crafts, POS assembly, PVC banner hemming, and so on.	
X6433	0.160	0.80	0~150°C	85	23.2	⊙	⊙	80um Red MOPP		
PET carrier - 65um Brown glassine liner										
X4210	0.08	0.6	-40~150°C	75	12.1	⊙	⊙	65µm Brown Glassine	• Premium grade, double coated 12um PET film tape • Special modified acrylic formula for LSE materials • RoHS & REACH compliance • With strong adhesion and high viscosity, applicable for automotive ABS plastic sheets, furniture decorative trims etc. • Excellent shearing resistance, superior bond strength under high temperture, good bonding effect to LSE materials. • Fixing of electronic products, internal bonding and fixing of rearview mirrors, bonding of earphone/microphone accessories, fixing of reflective films of digital cameras.	
X4220	0.1	0.64	-40~150°C	75	12.1	⊙	⊙	65µm Brown Glassine		
BOPP Carrier - General type										
62000	0.1	0.4	-25~65°C	85	23.2	⊙	⊙	114um White PE coated paper	• General purpose • Double coated embossed clear 0.25 mm BOPP film tape. • RoHS & REACH compliance • High quality, acrylic adhesive allows for use on a wide variety of surfaces • General industrial purposes including metals and plastics, name plates, etc. • Suitable for holdng, bonding and sealing as well as fastening of name plates, toys and rackets, especially for needs of high tensile strength	
Solvent-free Acrylic Adhesive										
Tissue Carrier - General type										
F3332	0.2	0.24	-20~50°C	2.0	0.8	⊙	⊙	115um White PE Coated Paper	• General purpose • RoHS & REACH compliance • General industrial purposes • Stationery purposes	
F3392	0.235	0.32	-20~50°C	2.0	0.8	⊙	⊙	115um White PE Coated Paper		
YCT120	0.12	0.4	-10~50°C	2.0	3.0	⊙	⊙	115um White PE Coated Paper	• Fixing nameplates inside vehicles and permanent bonding also for bonding plastic plates • RoHS & REACH compliance • Suitable for various applications, including fixing nameplates inside vehicles and permanent bonding. • Designed specifically for bonding plastic plates and mounting metallic and plastic mold parts.	
YCT140	0.202	0.2	-10~50°C	2.0	3.0	⊙	⊙	115um White PE Coated Paper		

★ The data provided herein are measurement only, and are not guaranteed.

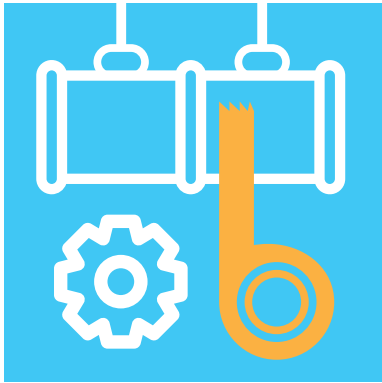

Special Tape



								Release Liner	
Product No.	Thickness (mm)	Adhesion (kg/cm)	Operating Temp	Elongation (%)	Tensile Strength (lbs/in)	RoHS	REACH SVHC 235		Description/Application
Aluminum Foil Tape									
4B8J2 4B8G2 (Matte)	0.18 、 0.2	0.31 、 0.36	-20~70℃	10	11.2	◎	◎	100um White one-sided PE coated paper	• RoHS & REACH compliance. • Made of pliable and malleable foil backing. • Ideal for pipe insulation of refrigerator and air-condition. • General industrial purposes.
4B892 4B882 (Shiny)	0.18 、 0.2	0.31 、 0.36	-20~70℃	10	11.2	◎	◎	100um White one-sided PE coated paper	
Aluminum foil carrier double-sided tape – General type									
FB732	0.202	0.2	-20~50℃	10	1.52	◎	◎	115um White PE Coated Paper	• RoHS & REACH compliance • Generally used for film and paper joints, which is convenient for metal detection.

★ The data provided herein are measurement only, and are not guaranteed.



Overlamine Tape




 Product No.	 Backing Material	 Thickness mm(mils)	 Backing mm(mils)	 Adhesion kg/cm(oz/in)	 Elongation (%)	 Tensile Strength kg/cm(lbs/in)
52293	BOPP	0.024(0.94)	0.02(0.75)	0.136(12.03)	80~180	2.16(11.88)
52273	BOPP	0.027(1.06)	0.02(0.75)	0.18(15.92)	80~180	2.16(11.88)
52203	BOPP	0.028(1.1)	0.02(0.87)	0.136(12.03)	80~180	2.24(12.32)
52323	BOPP	0.032(1.26)	0.02(0.87)	0.152(13.44)	80~180	2.24(12.32)
52313	BOPP	0.033(1.3)	0.03(0.98)	0.136(12.03)	80~180	2.56(14.08)
52253	BOPP	0.034(1.34)	0.03(0.98)	0.152(13.44)	80~180	2.56(14.08)
52243	Matte OPP	0.037(1.46)	0.03(1.18)	0.136(12.03)	50~150	3.4(18.7)
54003	Polyester	0.038(1.5)	0.03(0.98)	0.18(15.92)	50~150	3.2(17.6)
52113	BOPP	0.045(1.77)	0.03(0.98)	0.2(17.69)	80~180	2.56(14.08)
52233	BOPP	0.055(2.17)	0.03(1.18)	0.2(17.69)	80~180	3.4(18.7)

★ The data provided herein are measurement only, and are not guaranteed.



PE Protection Tape

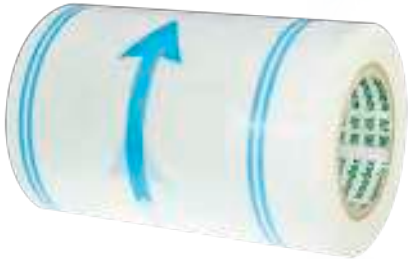

 Product No.	 Thickness (mm)	 Adhesion (kg/cm)	 Adhesion (Type)	 Elongation MD/TD(%)	 Tensile Strength MD/TD(lbs/in)	 Color	 Finish	 UV Resistant (Months)	 CO2 Laser	 Fiber Laser
Fiber Laser Cutting										
X5777	0.07	0.1	High	200/350	1/0.8	Black/Gray	Matte	6	☉	☉
X5773	0.075	0.138	Very High	200/350	1/0.8	Black/Gray	Matte	6	☉	☉
X5701	0.1	0.138	Very High	200/350	1.2/0.96	Black/Gray	Matte	6	☉	☉
CO2 Laser Cutting										
X5772	0.065	0.1	High	200/350	1/0.8	White	Matte	1	☉	
X5N7W	0.07	0.1	High	200/350	1/0.8	Black/Gray	Glossy	6	☉	
X5N89	0.08	0.1	High	200/350	1/0.8	Black/Gray	Glossy	6	☉	
X5N0Y	0.1	0.1	High	200/350	1.2/0.96	Black/Gray	Glossy	6	☉	
PE UV Resistant										
X5N7Z	0.07	0.04	Medium	200/350	1/0.8	Black/White	Glossy	6		
X5775	0.07	0.04	Medium	200/350	1.03/0.8	Black/White	Matte	6		
X5776	0.07	0.04	Medium	200/350	1.03/0.8	Black/White	Glossy	6		
X5N8U	0.08	0.04	Medium	200/350	1/0.8	Black/White	Glossy	6		
X578W	0.08	0.04	Medium	200/350	1.03/0.8	Black/White	Glossy	6		
X5785	0.08	0.04	Medium	200/350	1/0.8	Black/White	Glossy	6		
X5N0X	0.1	0.04	Medium	200/350	1.2/0.96	Black/White	Glossy	6		

★ The data provided herein are measurement only, and are not guaranteed.



Glue



 Product No.	 Viscosity (cps)	 Solid Content (%)	 Adhesion kg/cm(oz/in)	 PH (7±1)	 Tack (cm)	 Holding Power (mins)	 Application
R0022	50~200	55±0.5	0.24(21.16)	6.5	3.0	1440	• Yellow-retardant, quick stick, good adhesion and cohesion • Designed for a adhesive for BOPP tape • Not suitable for colored tape
R0032	50~200	55±0.5	0.24(21.16)	6.5	3.0	1440	• Quick stick, good adhesion and holding power • Designed for a adhesive for BOPP tape
R0052	5000~7000	55±0.5	0.4(35.27)	6.5	3.0	1440	• High adhesion and holding power



★ The data provided herein are measurement only, and are not guaranteed.




Release Liner



 Product No.	 Thickness (mm)	 Release Force (g/inch)	 Tensile Strength (kg/cm)	 Solvent/Solvent Free	 RoHS	 REACH SVHC 235	Color	 Description/Application
Release Liner								
83130	0.114	5~20/5~20	11.2	Solvent-Free	⊙	⊙	White	• Coated Wood-free Paper • Coated with glossy polyethylene on two sides. • Coated with easy-release silicone • Made as release paper for labels, stickers and adhesive tapes • Thickness of coating may be adjusted according to customers' needs
83160	0.141	5~20/5~20	6.3	Solvent-Free	⊙	⊙	White	• Kraft release paper • Coated with glossy polyethylene on two sides. • Coated with easy-release silicone • Made as release paper for labels, stickers and adhesive tapes • Thickness of coating may be adjusted according to customers' needs
820A0	0.08	5~20/5~20	4	Solvent-Free	⊙	⊙	White	• Synthetic PP film (glossy pearly film) coated with easy-release silicone on one side • Made as release paper for labels, stickers and adhesive tapes • Recyclable and printable with lightweight features
82310	0.08	5~20/30~50	1.6↑	Solvent-Free	⊙	⊙	Red	• MOPP release film • Coated with easy-release silicone on one side and medium-release silicone on the other side • Made as release liner of double-sided tapes • Wide service temperature range good for most applications • Environmentally friendly, odorless and non-toxic
X8496	0.023	80~150	1.5↑	Solvent-Free	⊙	⊙	transparent	• 100% Recycled PET release liner • Silicone single-sided Coated PET Release Film • Made as release liner for Eco-friendly water-based tape

★ The data provided herein are measurement only, and are not guaranteed.

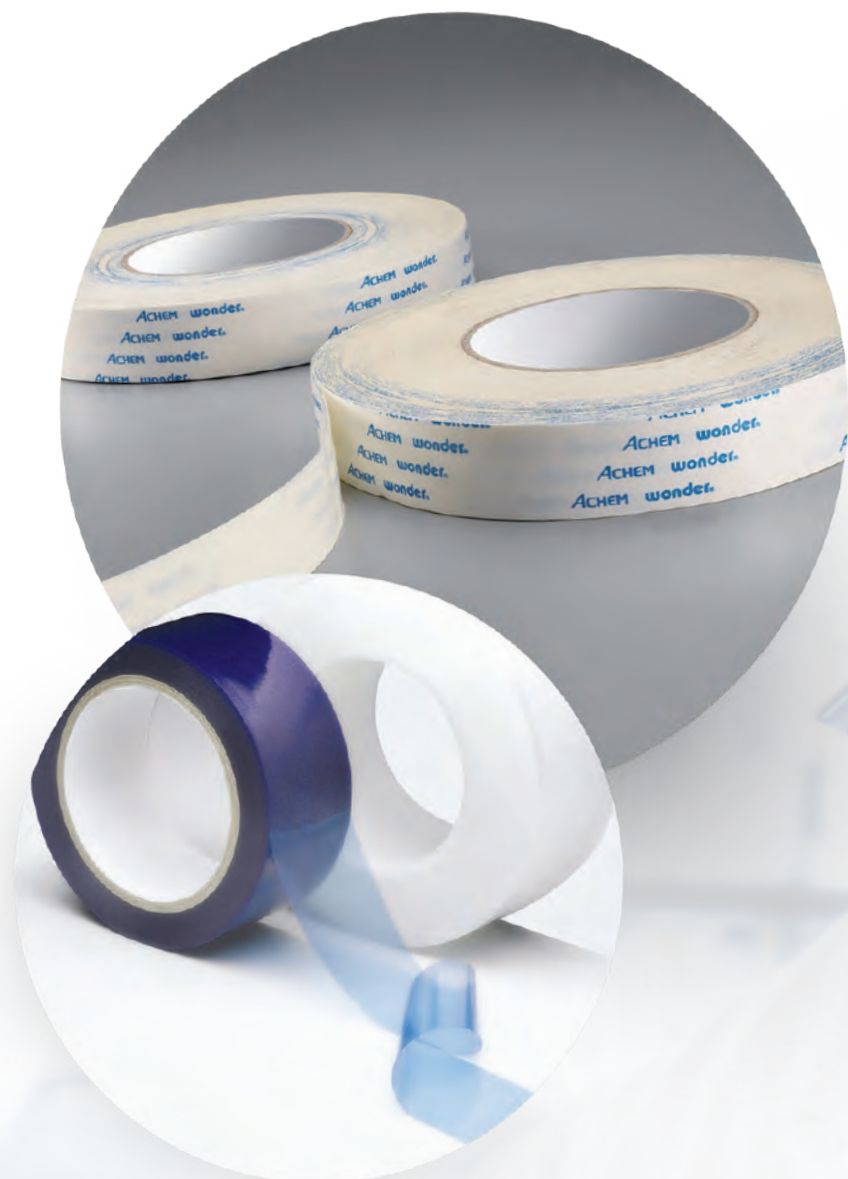

Reliable and Best Choice

ACHEM. wonder.



ACHEM TECHNOLOGY CORPORATION

No.397, Xingshan Rd., Neihu Dist., Taipei City 114, Taiwan

TEL: +886-2-81706199

E-mail: achem@achem.ycgroup.tw

<https://www.achem.com.tw/>