


UC YC GROUP

ACHEM[®] wonder[®]



JOIN AS ONE

www.achem.com



ACHEM® wonder®

Contents



Dispenser
Page 19




Super clear tape
Page 7



BOPP tape
Page 5





Overlamine Tape
Page 13



Double Sided Tape
Page 11




Stationery Tape
Page 9



Glue
Page 17



Solvent Tape
Page 7

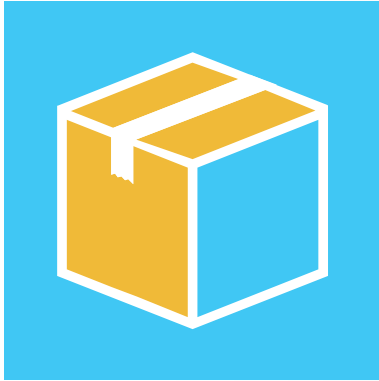


BOPP Tape




 Product No.	 Thickness mm(mils)	 Backing mm(mils)	 Adhesion kg/cm(oz/in)	 Holding Power (mins)	 Elongation (%)	 Tensile Strength kg/cm(lbs/in)	 Color	 Printing	 RoHS	 REACH
A2013	0.037(1.46)	0.022(0.87)	0.16↑(14.34)	≥1440	100-180	2.24↑(12.54)	©		©	©
A2N03	0.038(1.50)	0.025(0.99)	0.16↑(14.34)	≥1440	100-180	2.56↑(12.34)				
A2063	0.038(1.50)	0.023(0.91)	0.16↑(14.34)	≥1440	100-180	2.24↑(12.54)				
A2083	0.035(1.38)	0.023(0.91)	0.16↑(14.34)	≥1440	100-180	2.24↑(12.54)				
A2093	0.040(1.58)	0.023(0.91)	0.20↑(17.92)	≥1440	100-180	2.24↑(12.54)				
A2J03	0.040(1.58)	0.025(0.99)	0.16↑(14.34)	≥1440	100-180	2.56↑(14.34)				
A2913	0.043(1.70)	0.025(0.99)	0.20↑(17.92)	≥1440	100-180	2.56↑(14.34)				
A2J23	0.047(1.85)	0.025(0.99)	0.20↑(17.92)	≥1440	100-180	2.56↑(14.34)				
A2K03	0.045(1.78)	0.025(0.99)	0.20↑(17.92)	≥1440	100-180	2.56↑(14.34)				
A2603	0.048(1.89)	0.028(1.11)	0.20↑(17.92)	≥1440	100-180	3.03↑(16.98)				
A2803	0.050(1.97)	0.028(1.11)	0.20↑(17.92)	≥1440	100-180	3.03↑(16.98)				
A2203	0.054(2.13)	0.028(1.11)	0.20↑(17.92)	≥1440	100-180	3.03↑(16.98)				
A2703	0.050(1.97)	0.025(0.99)	0.20↑(17.92)	≥1440	100-180	2.56↑(12.34)				
A2323	0.062(2.44)	0.035(1.38)	0.20↑(17.92)	≥1440	100-180	4.00↑(22.40)				
A2313	0.065(2.54)	0.035(1.38)	0.24↑(21.50)	≥1440	100-180	4.00↑(22.40)				
A2323	0.062(2.44)	0.035(1.38)	0.20↑(17.92)	≥1440	100-180	4.00↑(22.40)				
A2413	0.090(3.54)	0.06(2.36)	0.24↑(21.50)	≥1440	100-180	6.32↑(35.39)				

★ The data provided herein are measurement only, and are not guaranteed.
★ The thickness allowance is +/- 0.004mm. The backing allowance is +/- 0.002mm.

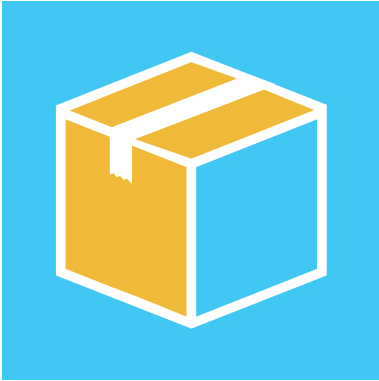

Super clear Tape




 Product No.	 Thickness mm(mils)	 Backing mm(mils)	 Adhesion kg/cm(oz/in)	 Holding Power (mins)	 Elongation (%)	 Tensile Strength kg/cm(lbs/in)	 Color	 Printing	 RoHS	 REACH
A2W13	0.048(1.89)	0.028↑(1.11)	0.2↑(17.92)	≥1440	100-180	3.03(16.98)	◎	◎	◎	◎
A2W23	0.049(1.93)	0.028↑(1.11)	0.2↑(17.92)	≥1440	100-180	3.03(16.98)				
A2W33	0.058(2.28)	0.030↑(1.18)	0.24↑(21.50)	≥1440	100-180	3.20(17.92)				
A2W43	0.068(2.68)	0.040↑(1.58)	0.24↑(21.50)	≥1440	100-180	4.80(26.88)				
A2W53	0.078(3.07)	0.048↑(1.89)	0.24↑(21.50)	≥1440	100-180	5.76(32.25)				
A2W63	0.045(1.78)	0.028↑(1.11)	0.2↑(17.92)	≥1440	100-180	3.03(16.98)				
A2W73	0.045(1.78)	0.025↑(0.98)	0.2↑(17.92)	≥1440	100-180	2.56(14.34)				
A2W83	0.065(2.56)	0.040↑(1.58)	0.24↑(21.50)	≥1440	100-180	4.80(26.88)				

Solvent Tape

 Product No.	 Thickness mm(mils)	 Adhesion kg/cm(oz/in)	 Holding Power (mins)	 Elongation (%)	 Tensile Strength kg/cm(lbs/in)	 Color	 Printing	 RoHS	 REACH
X66	0.045(1.77)	0.28↑(25.09)	/	≥20	3.63(19.60)	◎	◎	◎	◎
120	0.065(2.56)	0.30↑(26.88)	≥1440	100-180	4.80(26.88)				
S2G	0.065(2.56)	0.28↑(25.09)	≥1440	100-180	4.70(26.32)				
S2HL.R	0.080(3.15)	0.32↑(28.67)	≥1440	120-200	5.60(31.36)				



★ The data provided herein are measurement only,and are not guaranteed.

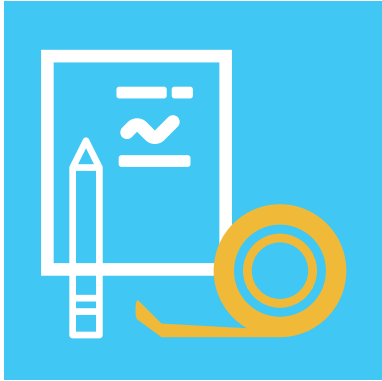


Stationery Tape



 General Use	 Product No.	 Thickness mm(mils)	 Backing mm(mils)	 Adhesion kg/cm(oz/in)	 Elongation (%)	 Tensile Strength kg/cm(lbs/in)	 Color	 Printing	 Photocopy	 RoHS	 REACH
	A2N03	0.038(1.50)	0.025↑(0.98)	0.16↑(14.34)	100-180	2.56(14.34)	◎		◎	◎	◎
	A2K03	0.045(1.77)	0.025↑(0.98)	0.20↑(17.92)	100-180	2.56(14.34)					
	A2303	0.065(2.56)	0.040↑(1.57)	0.20↑(17.92)	100-180	4.80(26.88)					
	32443	0.050(1.97)	0.030↑(1.18)	0.132↑(11.83)	50-150	3.40(19.04)					
	32383	0.050(1.97)	0.030↑(1.18)	0.132↑(11.83)	50-150	3.40(19.04)					
	A2W33	0.058(2.28)	0.030↑(1.18)	0.24↑(21.5)	100-180	3.20(17.92)					
	X66	0.045(1.77)	/	0.28↑(15.09)	≥20	3.628(19.60)					

Acetate cloth	 Product No.	 Thickness mm(mils)	 Backing mm(mils)	 Adhesion kg/cm(oz/in)	 Elongation (%)	 Tensile Strength kg/cm(lbs/in)	 Crystal Clear	 Color	 Easy Tear	 Photocopy	 RoHS	 Remark
	3A103	0.058(2.28)	0.039↑(1.54)	0.8↑(16.13)	≥20	2.4(13.44)	-	-	◎	◎	◎	1.Acetate pressure sensitive tape 2.Low noise 3.Easy writing 4.Invisible tape
	3A003	0.058(2.28)	0.039↑(1.54)	0.8↑(16.13)	≥20	2.4(13.44)						

★ The data provided herein are measurement only, and are not guaranteed.
★ The thickness allowance is +/- 0.004mm. The backing allowance is +/- 0.002mm.
★ The adhesive of item listed above are emulsion acrylic, except that "328M0" applies solvent acrylic.

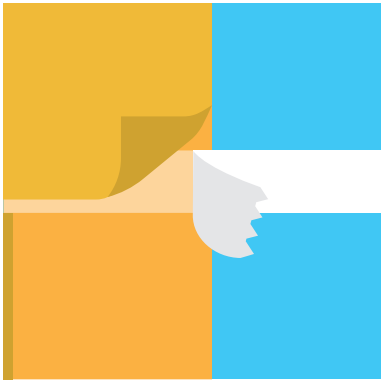

Double Sided Tape



 Product No.	 Thickness (mm)	 Adhesion (kg/cm)	 Elongation (%)	 Tensile Strength (lbs/in)	 RoHS	 REACH	Color	Material	 Description/Application
62103	0.065	0.2	≥80	358.38-337.58	◎	◎	White	PE Coated paper	·General industrial purposes ·Stationery purposes includeing envelopes decorative sheets.etc. ·Shoe industries cloth some electronic industnes.
62113	0.096	0.5	50-150	≥430.06	◎	◎		PE Coated paper	·General industrial purposes ·Stationery purposes includeing envelopes decorative sheets.etc. ·Shoe industries cloth some electronic industnes.
63703	0.165	0.33	/	≥100. N/100sqmm	◎	◎		PE Coated paper	·General industrial purposes ·Stationery purposes includeing envelopes decorative sheets.etc. ·Shoe industries cloth some electronic industnes.
63713	0.165	0.33	/	≥100. N/100sqmm	◎	◎		PE Coated paper	·General industrial purposes ·Stationery purposes includeing envelopes decorative sheets.etc. ·Shoe industries cloth some electronic industnes.
63704	0.07	0.531 (Summer)0.449(Winter)	/	/	◎	◎		PE Coated paper	·General industrial purposes ·Stationery purposes includeing envelopes decorative sheets.etc. ·Shoe industries cloth some electronic industnes.

★ The data provided herein are measurement only, and are not guaranteed.




Overlamine Tape



 Product No.	 Backing Material	 Thickness mm(mils)	 Backing mm(mils)	 Adhesion kg/cm(oz/in)	 Elongation (%)	 Tensile Strength kg/cm(lbs/in)
Glossy Overlamination Film						
52293	BOPP	0.024(0.94)	0.019(0.75)	0.136(12.19)	100-180	2.28(12.77)
52273	BOPP	0.027(1.06)	0.019(0.75)	0.8(16.13)	100-180	2.16(12.10)
52173	BOPP	0.020(0.79)	0.015(0.59)	0.1(18.96)	100-180	2.28(12.77)
52323	BOPP	0.032(1.26)	0.022(0.87)	0.152(13.62)	100-180	2.24(12.54)
52313	BOPP	0.033(1.30)	0.025(0.98)	0.136(12.19)	100-180	2.56(14.34)
52253	BOPP	0.034(1.34)	0.025(0.98)	0.152(13.62)	100-180	2.56(14.34)
52243	BOPP	0.037(1.46)	0.030(1.18)	0.136(12.19)	50-150	3.2(17.92)
54003	BOPP	0.038(1.50)	0.025(0.98)	0.18(16.13)	50-150	3.2(17.92)
52353	BOPP	0.040(1.57)	0.03(1.18)	0.16(14.34)	100-180	3.4(19.04)
52233	BOPP	0.055(2.17)	0.03(1.18)	0.2(17.92)	100-180	3.4(19.04)

★ The data provided herein are measurement only, and are not guaranteed.

 Product No.	 Backing Material	 Thickness mm(mils)	 Backing mm(mils)	 Adhesion kg/cm(oz/in)	 Elongation (%)	 Tensile Strength kg/cm(lbs/in)
Matte Overlamination Film						
52153	Matte BOPP	0.025(0.98)	0.09(0.75)	0.136(12.19)	50-150	3.2(17.92)
52193	Matte BOPP	0.027(1.06)	0.019(0.75)	0.136(12.19)	50-150	3.2(17.92)
52383	Matte BOPP	0.032(1.26)	0.025(0.98)	0.136(12.19)	50-150	2.56(14.34)

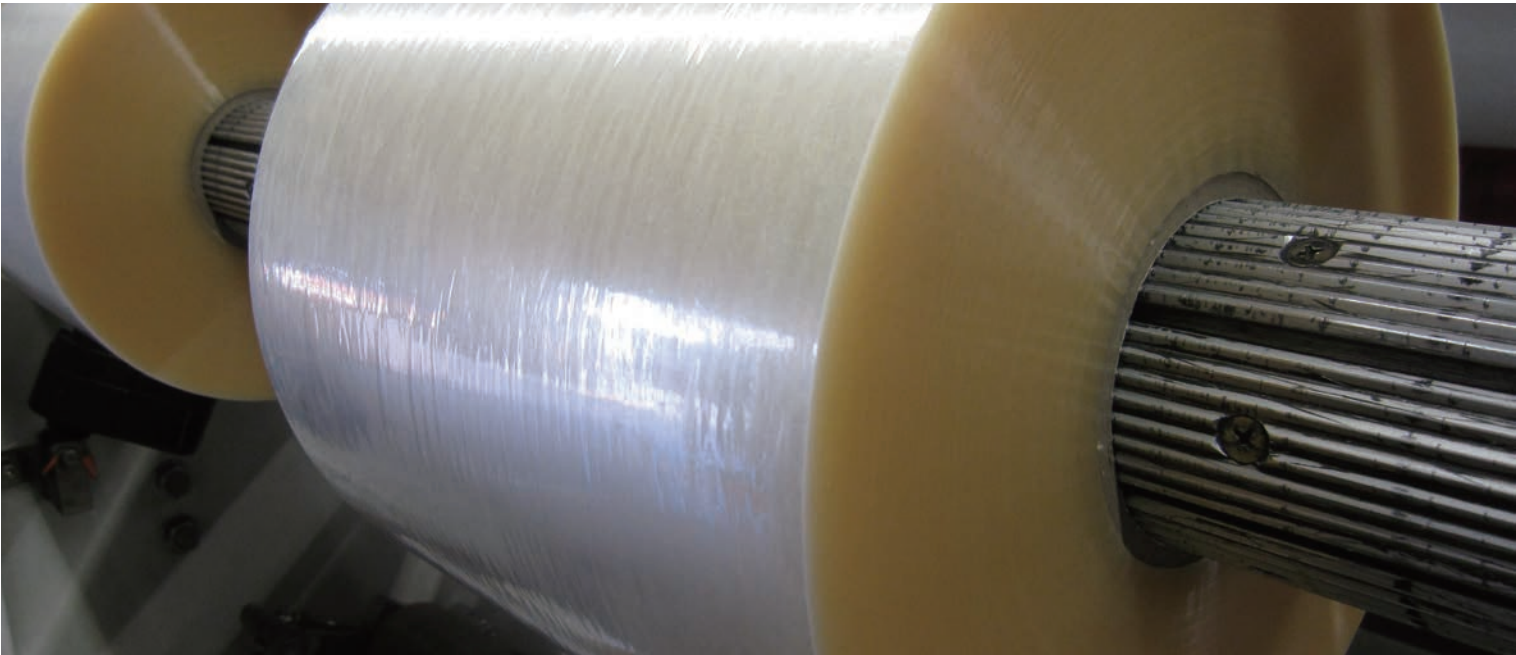

★ The data provided herein are measurement only, and are not guaranteed.




Glue



 Product No.	 Viscosity (cps)	 Solid Content (%)	 Adhesion kg/cm(oz/in)	 PH (7±1)	 Tack (cm)	 Holding Power (mins)	 Application
G520	75-200	55±1	0.2(17.92)	7	≤5	≥1440	G520 is an acrylic copolymer emulsion, which has good adhesion to metals, paperboards and plastics. Fast drying , suitable for high speed coating. It can be used to make BOPP film tape, paper-based tape and other products, suitable for OPP packaging and stationery tape.
G531	75-200	55±1	0.2(17.92)	7	≤5	≥1440	G531 is an acrylic copolymer emulsion, which has good adhesion and high cohesion to metals, paperboards and plastics. Fast drying , suitable for high speed coating. It can be used to make BOPP film tape, paper-based tape and other products, suitable for OPP Over-lamination tape and stationery tape.
G540	75-200	56±1	0.2(17.92)	7	≤5	≥1440	G540 is acrylic copolymerization emulsion, it has good adhesion to metal, cardboard, plastic and so on, has good yellow resistance. Fast drying, suitable for high speed coating. Can be used to make super transparent OPP packaging and stationery tape.
G532	30-70	50±1	0.152(13.62)	7	/	≥1440	G532 is acrylic copolymerization emulsion, it has good adhesion to metal, cardboard, plastic and so on. Fast drying, suitable for high speed coating. Can be used to make BOPP film tape, paper based tape and other products, suitable for OPP packaging, glazing film and stationery tape.
G561	100-200	50±1	0.128(11.47)	7	/	/	G561 is an acrylic copolymer emulsion, which is fast drying and suitable for coating with scraper and K-bar. It can be used to make Washi Tape and other paper-based tape. The product fits the paper well. And it is not easy to damage the paper.
G550	800-1000	53±1	0.2(17.92)	7	≤5	≥1440	G550 is acrylic copolymerization emulsion, it has good adhesion to metal, cardboard, plastic, glass and so on. Dry quickly, suitable for scraper coating. Can be used to make pearlescent film, pearlescent paper, coated paper label products.

★ The data provided herein are measurement only, and are not guaranteed.

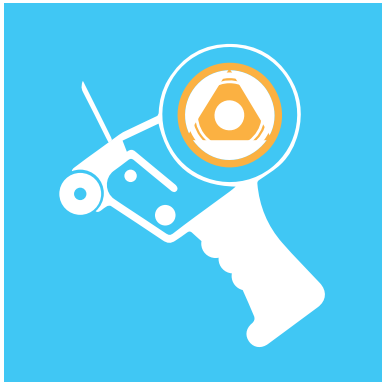

Dispenser

Product Name	Description
SL-206	2"width, 3"core, which can print the private logo
SL-207EZ	2"width, 3"core, which can print the private logo and it has the anti-drop advantages
SL-209	2"width, 3"core, which can print the private logo
SL-213	2"width, 3"core, which can print the private logo

Product Name	Description
SL-326	3"width, 3"core, which can print the private logo
SL-1038	2"width, 3"core, which can print the private logo and it has the elastic blade
SL-3398	3"width, 3"core, which can print the private logo and it has the elastic blade
SL-210	2"width, 3"core, the hand-held is skid resistance

SL-206



SL-207EZ



SL-326



SL-1038



SL-209



SL-213



SL-3398



SL-210






Dispenser


Product Name	Description
SL-821A	2"width, 1.5"core, it's very simplified and convenient
SL-600M	6"width, 3"core, it can apply to the long meters product
SL-7605K	0.5"width, 3"core, which can print the private logo
SL-9518	18"width, 3"core

Product Name	Description
SL-7326	desk top tape dispenser, 1"width with 2pcs combination, 2"core, it can print the private logo
SL-7336	desk top tape dispenser, 1"width with 3pcs combination, 3"core, it can print the private logo
SL-115	desk top tape dispenser, width 19mm, 1"core
SL-135	desk top tape dispenser, width 19mm, 1"core

SL-821A

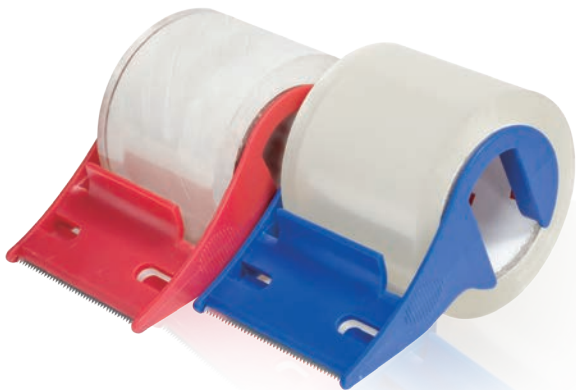


SL-600M

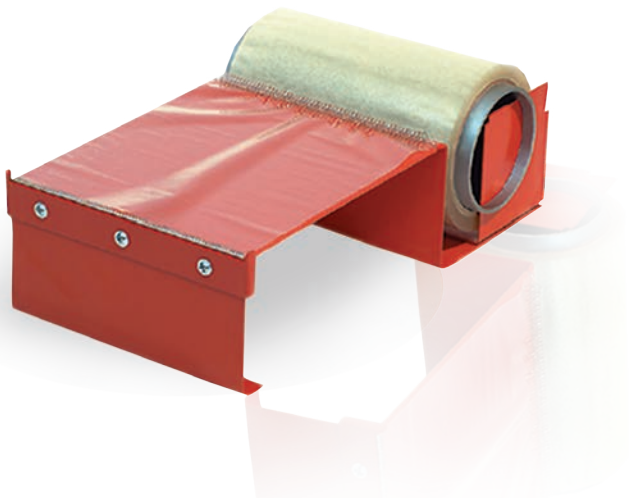

SL-7326



SL-7336

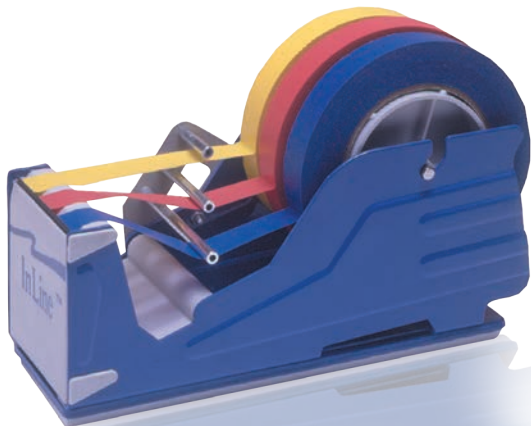

SL-7605K



SL-9518



SL-115



SL-135



RT-875




SL-267



SL-315




SL-306

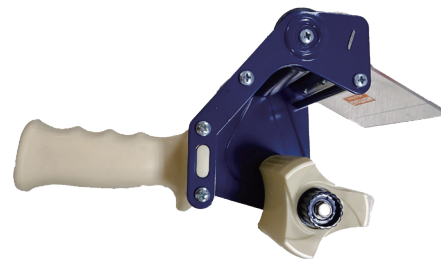

SL-2078




SL-2398

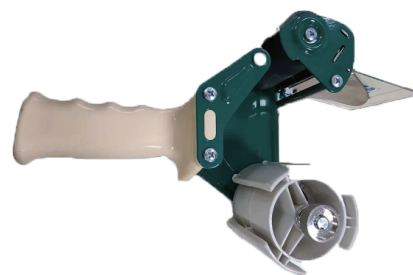

SL-239



SL-216

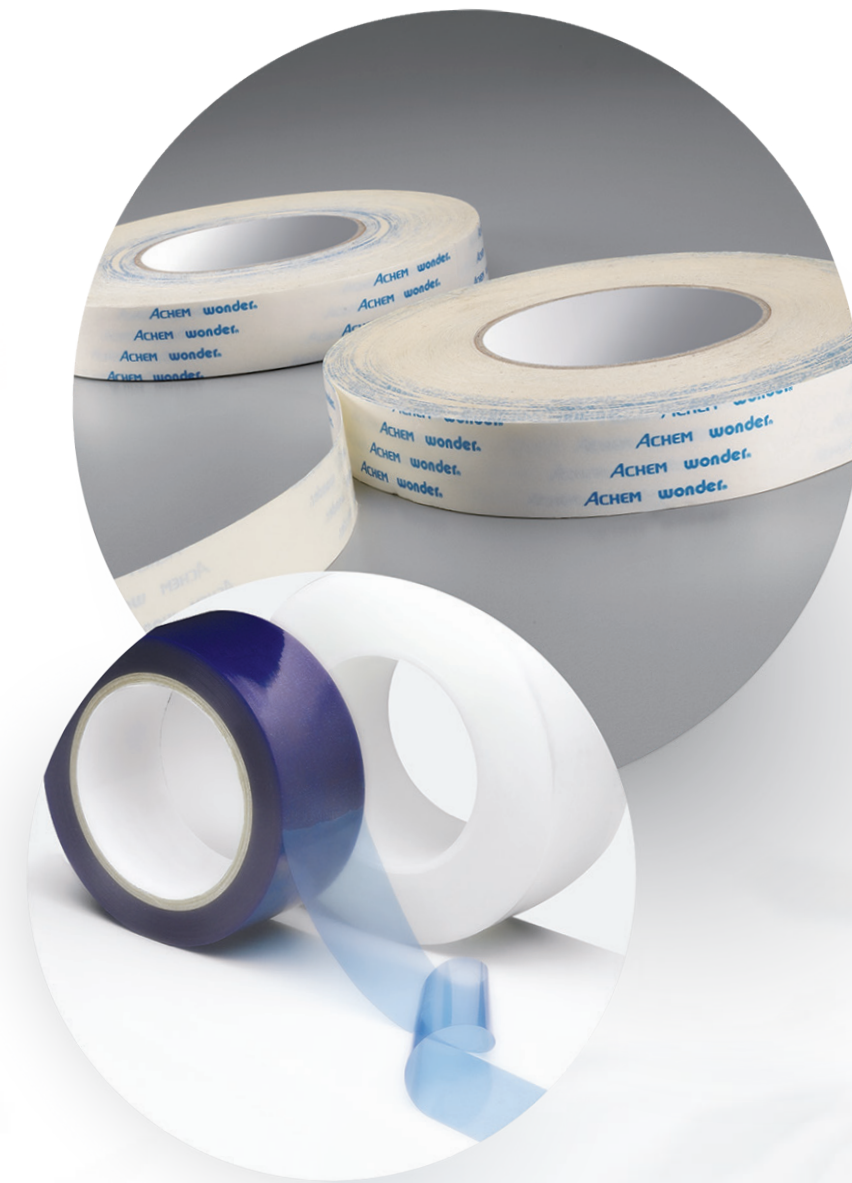

Reliable and Best Choice



Achem Technology (Ningbo) Co., Ltd
No.201 Huangshan West rd, Beilun Zone, Ningbo City,
Zhejiang Province, China 315800
TEL: +86-0574-86802592
Mail: Lily.Lian@achem-cn.ycgroup.tw
Site: www.achem.com